BOVER IL·LUMINACIÓ & MOBILIARI SL

Avinguda Catalunya, 173
Pol. Ind. Sud
08440 Cardedeu
Barcelona · Spain

Tels.: +34 93 871 31 52 / +34 93 844 47 54
Fax: +34 93 846 20 89
e-mail: info@bover.es
e-mail: export@bover.es
www.bover.es

Elipse PF/30-50
Outdoor

Alex Fernández Camps
&
Gonzalo Milà

Assembly instructions
Instructions de montage

DATA / RENSEIGNEMENTS

LIGHT / LUMINAIRE: *Elipse PF/30*
Elipse PF/50
TYPOLOGY / TYPOLOGIE: *CEILING* / PLAFONNIER
YEAR / ANNÉE: *2018*

MADE IN SPAIN / PRODUIT EN ESPAGNE

Product entirely produced in Barcelona.

Produit fabriqué entièrement à Barcelona.

TESTS / TESTS

This product has been subjected to the electrical safety test for: continuity, insulation, dielectric strength.

Ce produit a été soumis à des tests de sécurité électrique: continuité, isolation, rigidité diélectrique et prise de terre.

CLEANING INSTRUCTIONS
INSTRUCTION POUR LE NETTOYAGE

Do not use alcohol or solvents, use a soft cloth.

Ne pas utiliser d'alcool ou d'autres solvants, utilisez un chiffon doux.

CERTIFIED BY / CERTIFIÉ PAR

This product is manufactured according to the standards:

Ce produit est fabriqué selon les standards suivants:

UL 1598
CSA C22.2 Nº 250


Intertek
4006618


2 x MAX 14W E-26 TRIPLE CFL


TECHNICAL DATA / INFORMATIONS TECHNIQUES


Suitable for wet locations.
Input voltage: 120V~60Hz


Convient aux emplacements mouillés.
Tension d'alimentation: 120V~60Hz

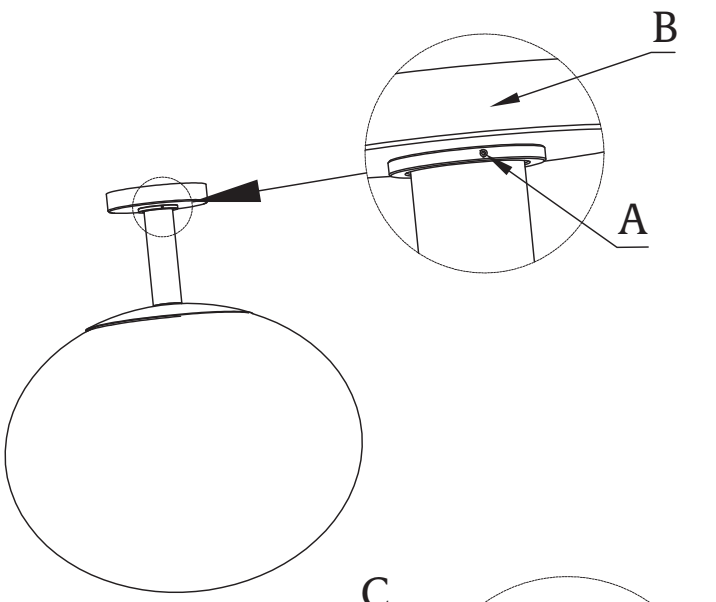

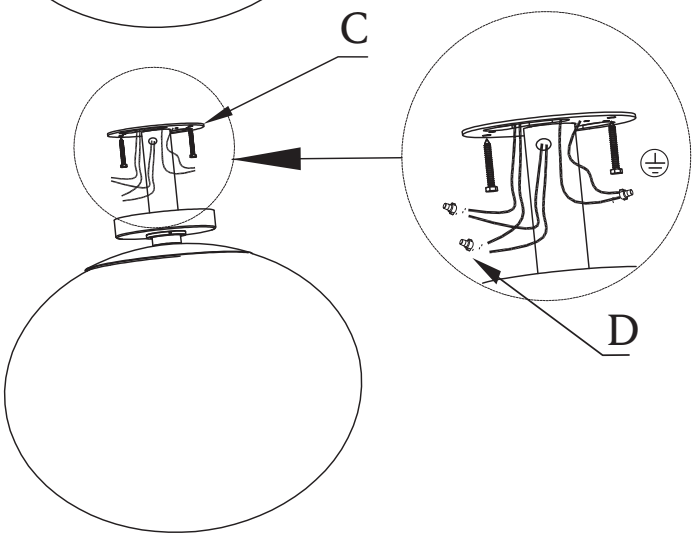



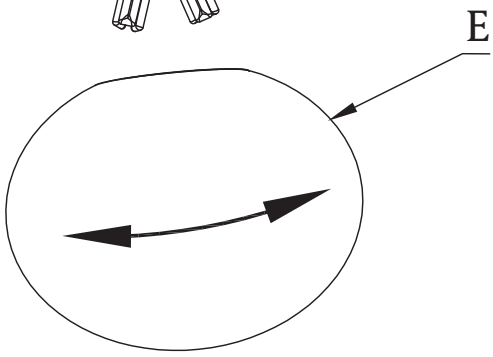

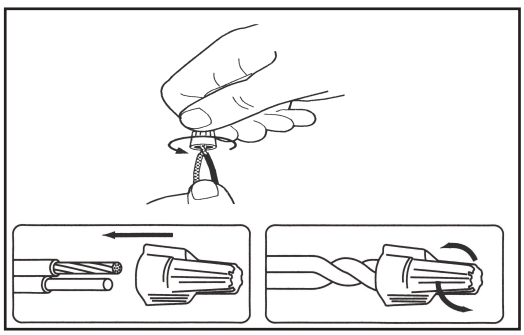

CAUTION

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

No loose strands or loose connections should be present. Secure with U.L. certified wire connectors and electrical tape.

WARNING

The electricity MUST be turned off at the MAINS FUSE BOX before installing of this luminaries; turning the power off using the light switch is not sufficient to prevent electrical shock.

Luminaries weighting 25 lbs (50 lbs for U.S.A) or more must be mounted directly to the building structure, independently of the electrical box; this installation should not be made on a radiantly heat type ceiling.

The luminarie is not intended to support external weight other than the provided components.

ELECTRICAL CONNECTION

Attach grounding wire (green insulate or bare copper) from the supplier circuit to the mounting bracket with the green ground attachment screw provided.

Connect the grounding wire of the luminaries to the ground conductor of the supply circuit. Attach all grounding conductors to the mounting bracket with the green ground wire attachment screw.

Referring to the Wire Connection Chart, connect the black and white wires

FINAL INSTALLATION

Install light bulbs, refer to the relamping label located near the lampholder for recommended wattage.

DO NOT EXCEED THE RECOMMENDED WATTAGE. Restore electricity and check the operation of the luminaries.

ASSEMBLY INSTRUCTIONS

1) Untighten the 2 A studs too free the canopy, move it besides the sphere.
2) Secure the C bracket to the ceiling.
3) Connect to D mains.
4) Reassemble B canopy.
5) Unscrew the shade E to screw the bulbs.

CONNECTION CHART


GREEN = G
BLACK = L
WHITE = N


NOTE:


In case the flexible wire gets damaged, it must be replaced only and exclusively by the manufacturer, its technical service or any other qualified person in order to avoid any risk.


NOTE:


In case of damage or breakage of the diffuser or joints they must be replaced, otherwise the lamp will lose protection.

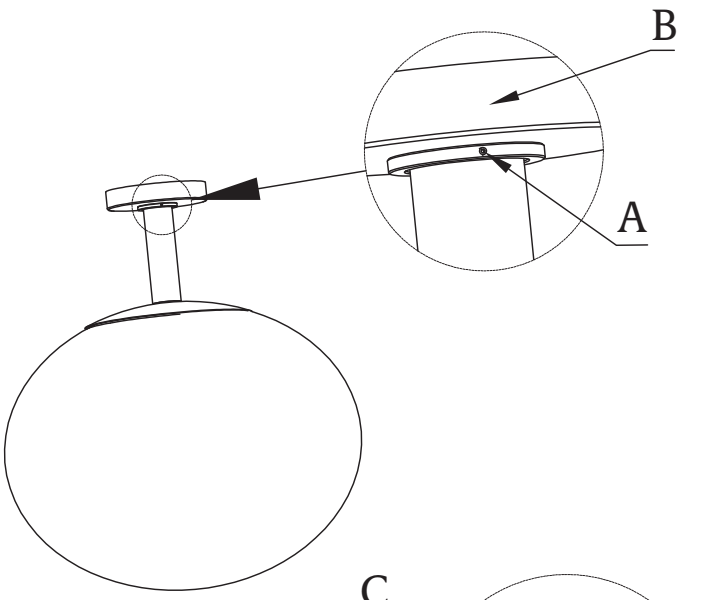

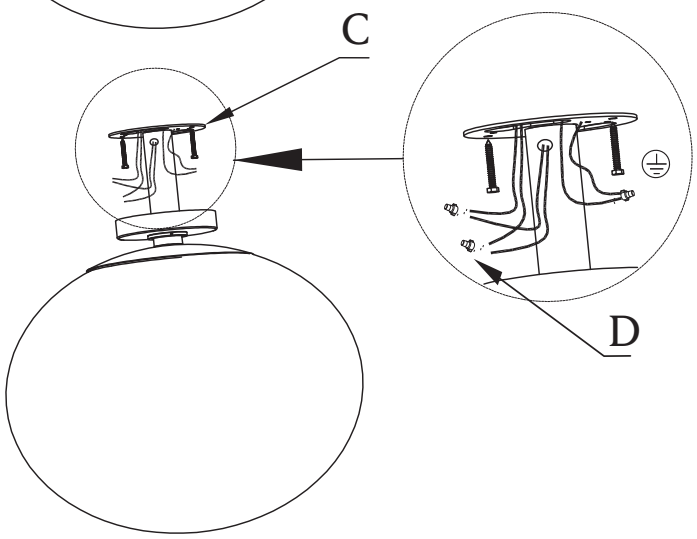



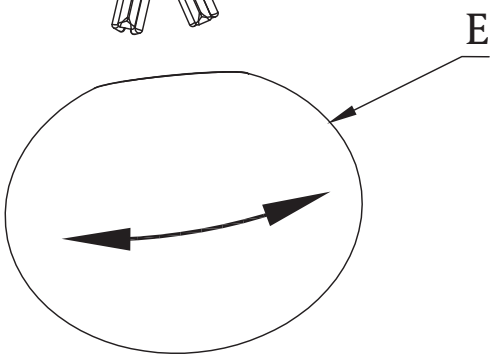

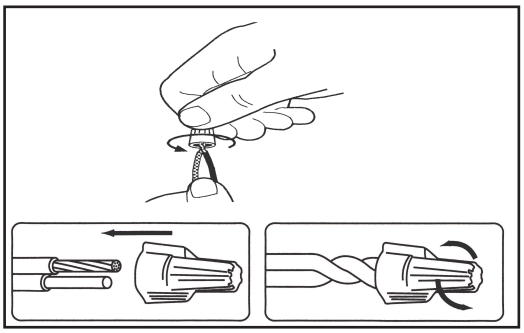

PRÉCAUTION

CE PRODUIT DOIT ÊTRE CONFORME À LA NORME D'INSTALLATION EN VIGUEUR.
IL DOIT ÊTRE INSTALLÉ PAR UN OPÉRATEUR DE LA FILIÈRE CONSTRUCTION ET INSTALLATION DU PRODUIT QUI DOIT CONNAÎTRE LES RISQUES ENCOURUS.
Il ne peut pas y avoir de câbles ou de connexions libres. Sécuriser à l'aide de connecteurs de câbles et ruban adhésif, certifiés UL.

AVERTISSEMENT

L'électricité doit être coupée au disjoncteur avant l'installation de ce luminaire. La mise hors tension en utilisant l'interrupteur éclairage n'est pas suffisante pour éviter un choc électrique. Les luminaires d'un poids de 25 lbs (50 lbs pour les USA) ou plus, doivent être montés directement sur la structure du bâtiment, indépendamment de la boîte électrique; cette installation ne doit pas être faite sur un plafond type radiant de chaleur.

CONNEXION ELECTRIQUE

Fixez le fil de terre (vert ou cuivre nu) du circuit d'alimentation au support de l'applique avec la vis de mise à terre fournie. Connecter le fil de mise à la terre du luminaire au conducteur de terre du circuit d'alimentation. Connecter tous les conducteurs de prise de terre au support de l'applique avec la vis de fixation.
Concernant les obligations de connexion des câbles, connectez les câbles noir et blanc.

INSTALLATION FINALE

Installer les ampoules, reportez-vous à l'étiquette de remplacement des lampes située près de la douille pour puissance recommandée.
NE PAS DEPASSER LA PUISSANCE RECOMMANDÉE.
Rétablir l'électricité et vérifier le fonctionnement de l'appareil.

INSTRUCTIONS DE MONTAGE

1) Déviser les 2 vis A pour laisser le canopée libre , et déplacer la sphère.
2) Sécuriser le support C au plafond.
3) Le connecter au réseau D.
4) Remonter la canopée B.
5) Dévisser l'abat-jour E pour visser les ampoules.

CONNECTION CHART

VERT = G
NOIR = L
BLANC = N

NOTE:

Dans le cas où le câble flexible est abîmé , il doit être remplacé uniquement et exclusivement par le fabricant, son service technique ou toute autre personne qualifiée afin d' éviter tout risque.

NOTE:

En cas de dommage ou de rupture du diffuseur ou les joints doivent être remplacés Ils, sinon la lampe va perdre la protection.