Luminaire

Code	12603026xxxU
Name	ARID_A/02_LEFT
Line	

Measurem.

Code	CL092A25D008GPE2ç
Name	ARID_A/02_LEFT

Source Data

Code	XPG4 reference XPGEWT-H1-0000-00000UB8E	Correlated Color Temperature (CCT)	2854K	Q.ty	1
Name	Cree	Color rendering index (CRI)	91		
Line					

Measurement data

Coordinate system	CG	Symmetry Type	Asymmetrical
Date	20-03-2025	Maximum Gamma Angle	180°
Measurement Distance	6.49m	Measurement Flux	95.0 lm
Maximum	5087.19 cd/klm	Position	C=270.0° G=87.5°
Remarks	RM25031905		

Electrical Parameters

Channel 1		Channel 2	
Voltage	0.00 V	Voltage	0.00 V
Current	0.00 A	Current	0.00 A
Power	3.02 W	Power	0.00 W
Frequency	0 Hz	Frequency	0 Hz
Power Factor	0.00	Power Factor	0.00

Environmental Parameters

Temperature	24.8 °C	Air Speed	0.0 m/s
Humidity	43.6 %		

Luminaire Dimensions


Round Luminaire	Diam.	18 mm	Height	200 mm	
Round Luminous Area	Diam.	12 mm	Height	0 mm	
Horizontal Luminous Area	0.000113 m2		Emitting area on Plane 180°	0.000000 m2	
Emitting area on Plane 0°	0.000000 m2		Emitting area on Plane 270°	0.000000 m2	
Emitting area on Plane 90°	0.000000 m2		Glare area at 76°	0.000027 m2	

Photometric Assessment

Luminaire Flux	95.0 lm	Source Flux	95.0 lm
Efficacy	31.470 lm/W	Efficiency	100.0 %
CIE Flux Codes	0 0 13 50 100	D DIN 5040	C11
F UTE	--	B NBN	BZ 10




Diam=18mm





ULOR 50.00 %
DLOR 50.00 %
RN 50.00 %

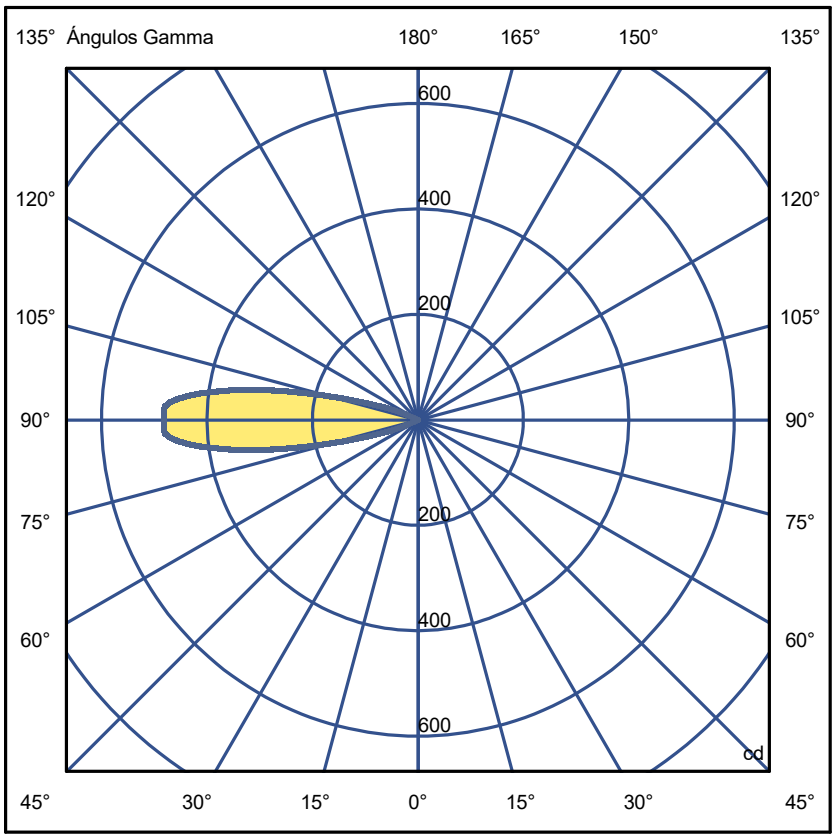

Luminaire
Code 12603026xxxU
Name ARID_A/02_LEFT
Measurem.
Code CL092A25D008GPE2ç
Name ARID_A/02_LEFT

Luminaire Flux	95 lm	Luminaire Power	3.0 W	Efficacy	31.470 lm/W	Efficiency	100.00%
Source Flux	95 lm	Maximum value	483.49 cd	Position	C=270.00 G=87.50	CG	Asymmetrical

Luminous Intensity Table cd **Table 1/2**

	C 0.00	C 15.00	C 30.00	C 45.00	C 60.00	C 75.00	C 90.00	C 105.00	C 120.00	C 135.00	C 150.00	C 165.00	C 180.00
G 0.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G 2.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G 5.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G 7.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G 10.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G 12.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G 15.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G 17.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G 20.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G 22.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G 25.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G 27.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G 30.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G 32.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G 35.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G 37.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G 40.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G 42.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G 45.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G 47.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G 50.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G 52.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G 55.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G 57.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G 60.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G 62.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G 65.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G 67.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G 70.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G 72.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G 75.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G 77.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G 80.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G 82.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G 85.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G 87.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G 90.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G 92.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G 95.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G 97.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G100.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G102.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G105.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G107.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G110.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G112.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G115.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G117.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G120.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G122.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G125.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G127.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G130.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G132.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G135.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G137.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G140.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G142.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G145.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G147.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G150.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G152.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G155.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G157.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G160.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G162.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G165.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G167.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G170.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G172.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G175.0	0	0	0	0	0	0	0	0	0	0	0	0	0
G177.5	0	0	0	0	0	0	0	0	0	0	0	0	0
G180.0	0	0	0	0	0	0	0	0	0	0	0	0	0

Luminaire
Code 12603026xxxU
Name ARID_A/02_LEFT
Measurem.
Code CL092A25D008GPE2ç
Name ARID_A/02_LEFT

Luminaire Flux	95 lm	Luminaire Power	3.0 W	Efficacy	31.470 lm/W	Efficiency	100.00%
Source Flux	95 lm	Maximum value	483.49 cd	Position	C=270.00 G=87.50	CG	Asymmetrical


Luminous Intensity Table cd **Table 2/2**

	C 195.00	C 210.00	C 225.00	C 240.00	C 255.00	C 270.00	C 285.00	C 300.00	C 315.00	C 330.00	C 345.00
G 0.0	0	0	0	0	0	0	0	0	0	0	0
G 2.5	0	0	0	0	0	0	0	0	0	0	0
G 5.0	0	0	0	0	0	0	0	0	0	0	0
G 7.5	0	0	0	0	0	0	0	0	0	0	0
G 10.0	0	0	0	0	0	0	0	0	0	0	0
G 12.5	0	0	0	0	0	0	0	0	0	0	0
G 15.0	0	0	0	0	0	0	0	0	0	0	0
G 17.5	0	0	0	0	0	0	0	0	0	0	0
G 20.0	0	0	0	0	0	0	0	0	0	0	0
G 22.5	0	0	0	0	0	0	0	0	0	0	0
G 25.0	0	0	0	0	0	0	0	0	0	0	0
G 27.5	0	0	0	0	0	0	0	0	0	0	0
G 30.0	0	0	0	0	0	0	0	0	0	0	0
G 32.5	0	0	0	0	0	0	0	0	0	0	0
G 35.0	0	0	0	0	0	0	0	0	0	0	0
G 37.5	0	0	0	0	0	0	0	0	0	0	0
G 40.0	0	0	0	0	0	0	0	0	0	0	0
G 42.5	0	0	0	0	0	0	0	0	0	0	0
G 45.0	0	0	0	0	0	0	0	0	0	0	0
G 47.5	0	0	0	0	0	0	0	0	0	0	0
G 50.0	0	0	0	0	0	0	0	0	0	0	0
G 52.5	0	0	0	0	0	0	0	0	0	0	0
G 55.0	0	0	0	0	0	1	0	0	0	0	0
G 57.5	0	0	0	0	0	1	0	0	0	0	0
G 60.0	0	0	0	0	1	3	1	0	0	0	0
G 62.5	0	0	0	0	2	6	2	0	0	0	0
G 65.0	0	0	0	0	4	17	4	0	0	0	0
G 67.5	0	0	0	0	7	43	7	0	0	0	0
G 70.0	0	0	0	0	15	71	15	0	0	0	0
G 72.5	0	0	0	1	30	110	30	1	0	0	0
G 75.0	0	0	0	1	48	173	48	1	0	0	0
G 77.5	0	0	0	1	70	247	70	1	0	0	0
G 80.0	0	0	0	1	96	330	96	1	0	0	0
G 82.5	0	0	0	2	126	401	126	2	0	0	0
G 85.0	0	0	0	2	151	458	151	2	0	0	0
G 87.5	0	0	0	2	168	483	168	2	0	0	0
G 90.0	0	0	0	2	171	481	171	2	0	0	0
G 92.5	0	0	0	2	168	483	168	2	0	0	0
G 95.0	0	0	0	2	151	458	151	2	0	0	0
G 97.5	0	0	0	2	126	401	126	2	0	0	0
G100.0	0	0	0	1	96	330	96	1	0	0	0
G102.5	0	0	0	1	70	247	70	1	0	0	0
G105.0	0	0	0	1	48	173	48	1	0	0	0
G107.5	0	0	0	1	30	110	30	1	0	0	0
G110.0	0	0	0	0	15	71	15	0	0	0	0
G112.5	0	0	0	0	7	43	7	0	0	0	0
G115.0	0	0	0	0	4	17	4	0	0	0	0
G117.5	0	0	0	0	2	6	2	0	0	0	0
G120.0	0	0	0	0	1	3	1	0	0	0	0
G122.5	0	0	0	0	0	1	0	0	0	0	0
G125.0	0	0	0	0	0	1	0	0	0	0	0
G127.5	0	0	0	0	0	0	0	0	0	0	0
G130.0	0	0	0	0	0	0	0	0	0	0	0
G132.5	0	0	0	0	0	0	0	0	0	0	0
G135.0	0	0	0	0	0	0	0	0	0	0	0
G137.5	0	0	0	0	0	0	0	0	0	0	0
G140.0	0	0	0	0	0	0	0	0	0	0	0
G142.5	0	0	0	0	0	0	0	0	0	0	0
G145.0	0	0	0	0	0	0	0	0	0	0	0
G147.5	0	0	0	0	0	0	0	0	0	0	0
G150.0	0	0	0	0	0	0	0	0	0	0	0
G152.5	0	0	0	0	0	0	0	0	0	0	0
G155.0	0	0	0	0	0	0	0	0	0	0	0
G157.5	0	0	0	0	0	0	0	0	0	0	0
G160.0	0	0	0	0	0	0	0	0	0	0	0
G162.5	0	0	0	0	0	0	0	0	0	0	0
G165.0	0	0	0	0	0	0	0	0	0	0	0
G167.5	0	0	0	0	0	0	0	0	0	0	0
G170.0	0	0	0	0	0	0	0	0	0	0	0
G172.5	0	0	0	0	0	0	0	0	0	0	0
G175.0	0	0	0	0	0	0	0	0	0	0	0
G177.5	0	0	0	0	0	0	0	0	0	0	0
G180.0	0	0	0	0	0	0	0	0	0	0	0

Luminaire
Code 12603026xxxU
Name ARID_A/02_LEFT
Measurem.
Code CL092A25D008GPE2ç
Name ARID_A/02_LEFT


Luminaire Flux	95 lm	Luminaire Power	3.0 W	Efficacy	31.470 lm/W	Efficiency	100.00%
Source Flux	95 lm	Maximum value	483.49 cd	Position	C=270.00 G=87.50	CG	Asymmetrical

Diam=18mm



Semiplanos C



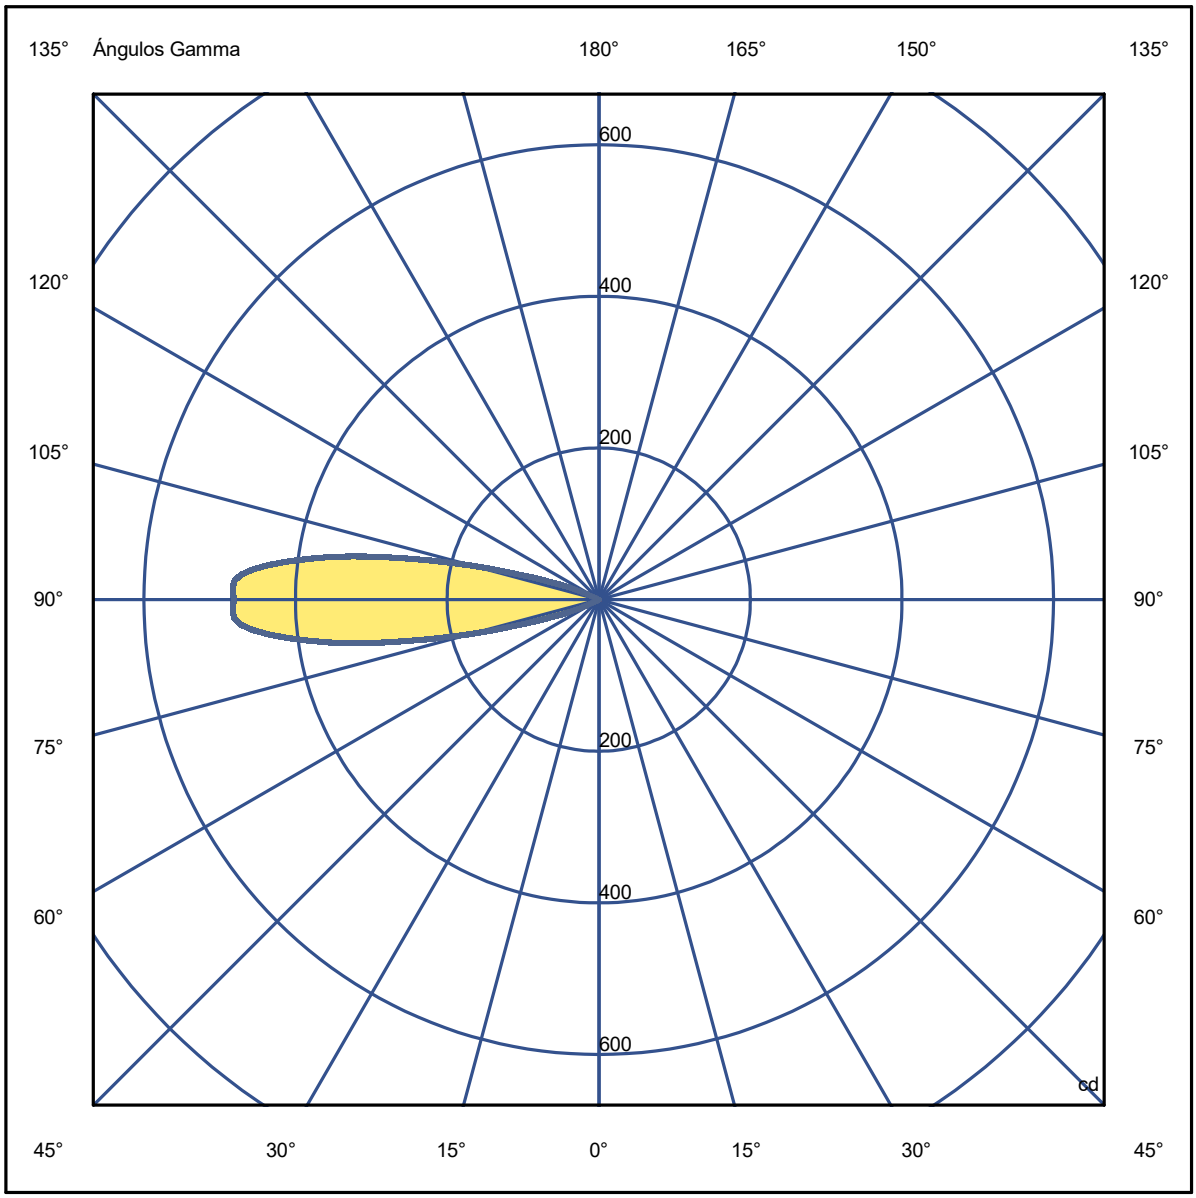

Luminaire
Code 12603026xxxU
Name ARID_A/02_LEFT
Measurem.
Code CL092A25D008GPE2ç
Name ARID_A/02_LEFT

Luminaire Flux	95 lm	Luminaire Power	3.0 W	Efficacy	31.470 lm/W	Efficiency	100.00%
Source Flux	95 lm	Maximum value	483.49 cd	Position	C=270.00 G=87.50	CG	Asymmetrical

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Working Plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room Dimensions	Lateral View					Viewed Endwise				
x=2H y=2H	< 0	< 0	< 0	< 0	< 0	15.7	16.8	16.6	17.8	19.0
x=2H y=3H	< 0	< 0	< 0	< 0	< 0	38.2	39.3	39.1	40.2	41.5
x=2H y=4H	< 0	< 0	< 0	< 0	< 0	46.7	47.8	47.7	48.7	50.1
x=2H y=6H	< 0	< 0	< 0	< 0	< 0	54.4	55.4	55.3	56.4	57.7
x=2H y=8H	< 0	< 0	< 0	< 0	< 0	57.8	58.7	58.7	59.7	61.0
x=2H y=12H	< 0	< 0	< 0	< 0	< 0	60.9	61.8	61.9	62.8	64.2
x=4H y=2H	< 0	< 0	< 0	< 0	< 0	15.2	16.2	16.1	17.2	18.5
x=4H y=3H	< 0	< 0	< 0	< 0	< 0	37.7	38.7	38.7	39.7	41.0
x=4H y=4H	< 0	< 0	< 0	< 0	< 0	46.3	47.2	47.3	48.2	49.5
x=4H y=6H	< 0	< 0	< 0	< 0	< 0	54.2	55.1	55.2	56.1	57.4
x=4H y=8H	< 0	< 0	< 0	< 0	< 0	57.9	58.7	58.9	59.8	61.1
x=4H y=12H	< 0	< 0	< 0	< 0	< 0	61.6	62.3	62.6	63.4	64.7
x=8H y=4H	15.9	16.6	16.8	17.7	19.1	46.0	46.8	47.0	47.9	49.2
x=8H y=6H	15.7	16.4	16.7	17.5	18.8	54.0	54.7	55.0	55.8	57.1
x=8H y=8H	15.6	16.3	16.6	17.3	18.7	57.7	58.4	58.7	59.5	60.9
x=8H y=12H	15.5	16.1	16.5	17.2	18.6	61.6	62.2	62.6	63.3	64.7
x=12H y=4H	23.6	24.4	24.6	25.4	26.8	45.9	46.7	46.9	47.7	49.1
x=12H y=6H	23.5	24.1	24.5	25.2	26.6	53.9	54.6	54.9	55.6	57.0
x=12H y=8H	23.4	24.0	24.4	25.1	26.5	57.7	58.3	58.7	59.3	60.7

Luminaire
Code 12603026xxxU
Name ARID_A/02_LEFT
Measurem.
Code CL092A25D008GPE2ç
Name ARID_A/02_LEFT

Luminaire Flux	95 lm	Luminaire Power	3.0 W	Efficacy	31.470 lm/W	Efficiency	100.00%
Source Flux	95 lm	Maximum value	483.49 cd	Position	C=270.00 G=87.50	CG	Asymmetrical

Could not find 90270 left beam anglegamma0180=-72


Could not find 90270 left beam anglegamma0180=-72

Could not find 90270 left beam anglegamma0180=-72

Luminaire
Code 12603026xxxU
Name ARID_A/02_LEFT
Measurem.
Code CL092A25D008GPE2ç
Name ARID_A/02_LEFT


Luminaire Flux	95 lm	Luminaire Power	3.0 W	Efficacy	31.470 lm/W	Efficiency	100.00%
Source Flux	95 lm	Maximum value	483.49 cd	Position	C=270.00 G=87.50	CG	Asymmetrical

Diam=18mm



Semiplanos C



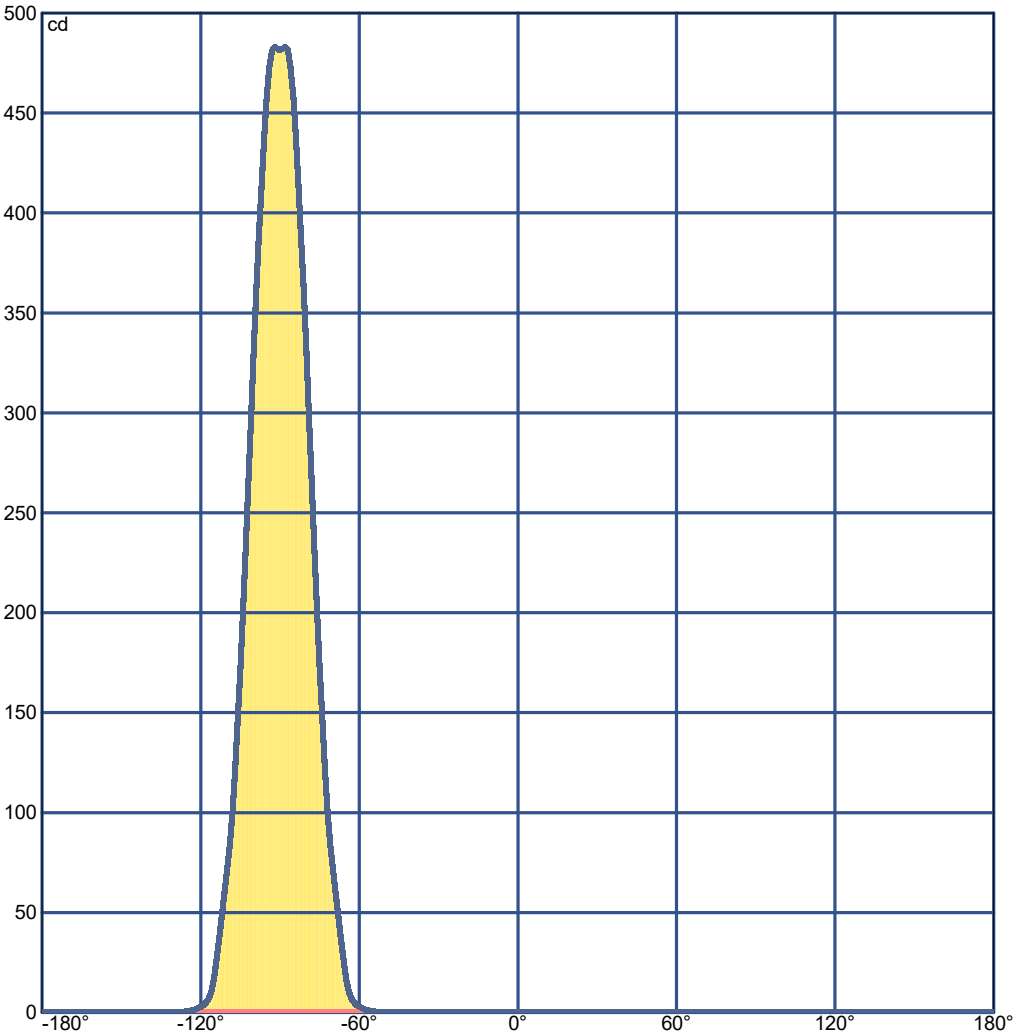

Luminaire
Code 12603026xxxU
Name ARID_A/02_LEFT
Measurem.
Code CL092A25D008GPE2ç
Name ARID_A/02_LEFT

Luminaire Flux	95 lm	Luminaire Power	3.0 W	Efficacy	31.470 lm/W	Efficiency	100.00%
Source Flux	95 lm	Maximum value	483.49 cd	Position	C=270.00 G=87.50	CG	Asymmetrical

Flujo Total= 95.04 Flujo Luminaria= 95.04


RI	0.60	0.80	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	10.00	20.00
DRR	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.09	0.15	0.20	0.40	0.58
RC	-	-	-	-	-	-	-	-	-	-	-	-

Flujo Zonal por 1000 Lúmenes

Y°	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
ZF(Y)	0	0	0	0	0	1	17	151	500	849	983	999	1000	1000	1000	1000	1000	1000

Códigos de Flujo C.I.E.
0 0 13 50 100

C.I.E.	-/-/-/-/-/-/-/-/-/-	LOR	100.00000 %
D DIN 5040	C11	ULOR	50.00000 %
F UTE	--	DLOR	50.00000 %
B NBN	BZ 10	UFF	50.00000 %
RN	50.00000 %	DFF	50.00000 %
BLF	1.0	FFR	100.00000 %

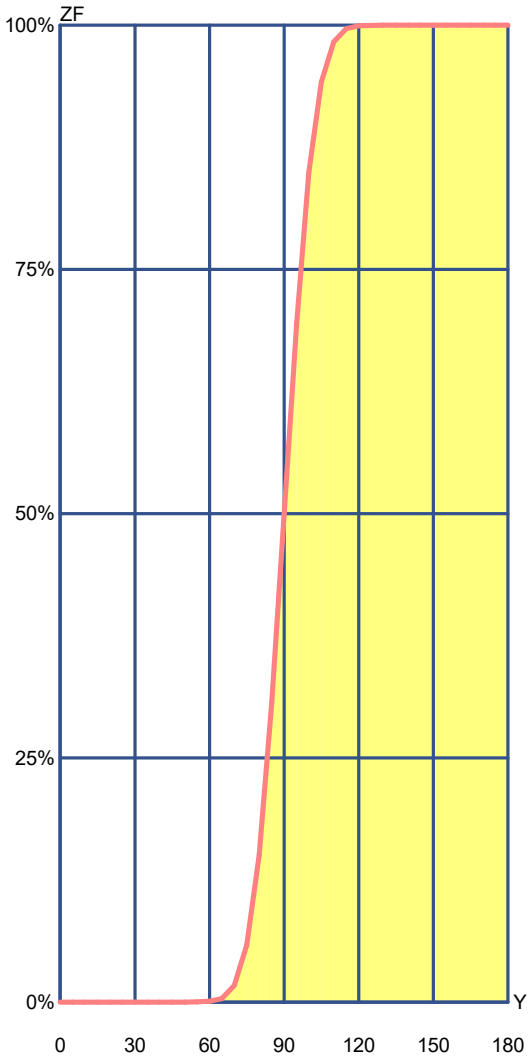


Flujo Zonal				
Gamma °	Flujo	Suma lm	Flujo [%]	Suma [%]
0°	0.00	0.00	0.00%	0.00 %
5°	0.00	0.00	0.00 %	0.00 %
10°	0.00	0.00	0.00 %	0.00 %
15°	0.00	0.00	0.00 %	0.00 %
20°	0.00	0.00	0.00 %	0.00 %
25°	0.00	0.01	0.00 %	0.00 %
30°	0.01	0.01	0.00 %	0.00 %
35°	0.01	0.02	0.00 %	0.00 %
40°	0.02	0.04	0.00 %	0.00 %
45°	0.02	0.06	0.00 %	0.01 %
50°	0.05	0.11	0.00 %	0.01 %
55°	0.14	0.25	0.01 %	0.03 %
60°	0.62	0.87	0.06 %	0.09 %
65°	2.76	3.63	0.28 %	0.36 %
70°	13.44	17.07	1.34 %	1.71 %
75°	41.17	58.24	4.12 %	5.82 %
80°	92.39	150.63	9.24 %	15.06 %
85°	155.03	305.66	15.50 %	30.57 %
90°	194.34	500.00	19.43 %	50.00 %
95°	194.34	694.34	19.43 %	69.43 %
100°	155.03	849.37	15.50 %	84.94 %
105°	92.39	941.76	9.24 %	94.18 %
110°	41.17	982.93	4.12 %	98.29 %
115°	13.44	996.37	1.34 %	99.64 %
120°	2.76	999.13	0.28 %	99.91 %
125°	0.62	999.75	0.06 %	99.97 %
130°	0.14	999.89	0.01 %	99.99 %
135°	0.05	999.94	0.00 %	99.99 %
140°	0.02	999.96	0.00 %	100.00 %
145°	0.02	999.98	0.00 %	100.00 %
150°	0.01	999.99	0.00 %	100.00 %
155°	0.01	999.99	0.00 %	100.00 %
160°	0.00	1000.00	0.00 %	100.00 %
165°	0.00	1000.00	0.00 %	100.00 %
170°	0.00	1000.00	0.00 %	100.00 %
175°	0.00	1000.00	0.00 %	100.00 %
180°	0.00	1000.00	0.00 %	100.00 %

Luminaire
Code 12603026xxxU
Name ARID_A/02_LEFT
Measurem.
Code CL092A25D008GPE2ç
Name ARID_A/02_LEFT

Luminaire Flux	95 lm	Luminaire Power	3.0 W	Efficacy	31.470 lm/W	Efficiency	100.00%
Source Flux	95 lm	Maximum value	483.49 cd	Position	C=270.00 G=87.50	CG	Asymmetrical

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=2.50m

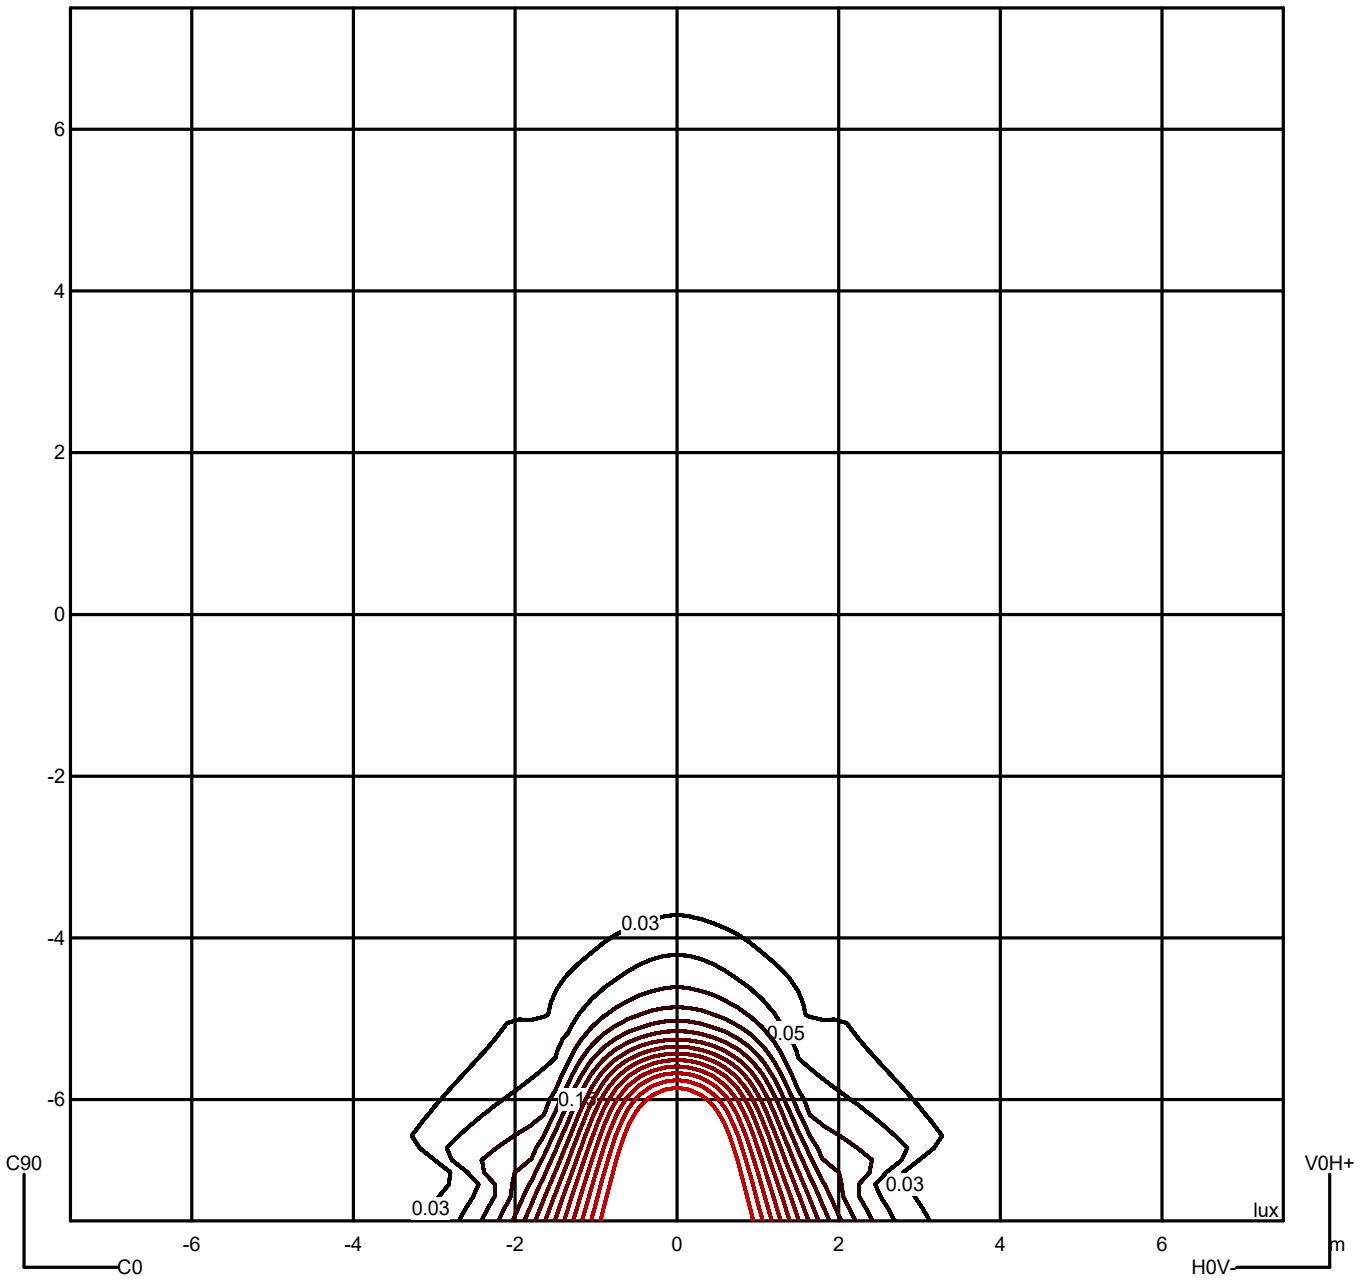

Luminaire
Code 12603026xxxU
Name ARID_A/02_LEFT
Measurem.
Code CL092A25D008GPE2ç
Name ARID_A/02_LEFT

Luminaire Flux	95 lm	Luminaire Power	3.0 W	Efficacy	31.470 lm/W	Efficiency	100.00%
Source Flux	95 lm	Maximum value	483.49 cd	Position	C=270.00 G=87.50	CG	Asymmetrical

Spectral Data

Std.: No import standard

CIE1931	x =0.453419	y =0.418564	Color rendering index (CRI)
CIE1960	u =0.254876	v =0.352924	Color Rendering Components
CIE1976	u'=0.254876	v'=0.529387	
D(u,v)	0.00357		

CCT = [2854 K]*


CRI8(Ra) [91.0]* CRI15(Rav) [87.6]*


R 1: 90.9	R 2: 92.8	R 3: 93.9	R 4: 93.0	R 5: 90.0
R 6: 91.1	R 7: 94.1	R 8: 82.6	R 9: 57.3	R10: 82.6
R11: 93.5	R12: 78.7	R13: 90.9	R14: 95.8	R15: 86.7

Spectral Distribution

l(nm)	Normalised	l(nm)	Normalised	l(nm)	Normalised
380.0	0.002299	386.0	0.004751	392.0	0.002867
398.0	0.004668	404.0	0.007322	410.0	0.010640
416.0	0.025118	422.0	0.051659	428.0	0.093483
434.0	0.155213	440.0	0.250000	446.0	0.341232
452.0	0.283175	458.0	0.200237	464.0	0.176540
470.0	0.149289	476.0	0.148104	482.0	0.170616
488.0	0.209716	494.0	0.267773	500.0	0.330569
506.0	0.386256	512.0	0.433649	518.0	0.469194
524.0	0.504739	530.0	0.535545	536.0	0.566351
542.0	0.591232	548.0	0.626777	554.0	0.652844
560.0	0.676540	566.0	0.703791	572.0	0.728673
578.0	0.763033	584.0	0.798578	590.0	0.829384
596.0	0.875592	602.0	0.912322	608.0	0.941943
614.0	0.972749	620.0	0.989336	626.0	0.989336
632.0	0.977488	638.0	0.952607	644.0	0.915877
650.0	0.867299	656.0	0.803318	662.0	0.739336
668.0	0.664692	674.0	0.604265	680.0	0.529621
686.0	0.468009	692.0	0.411137	698.0	0.355450
704.0	0.305687	710.0	0.260664	716.0	0.222749
722.0	0.188389	728.0	0.161137	734.0	0.135071
740.0	0.112796	746.0	0.096327	752.0	0.078199
758.0	0.066469	764.0	0.058886	770.0	0.044313
776.0	0.039218				

Spectrum Graph

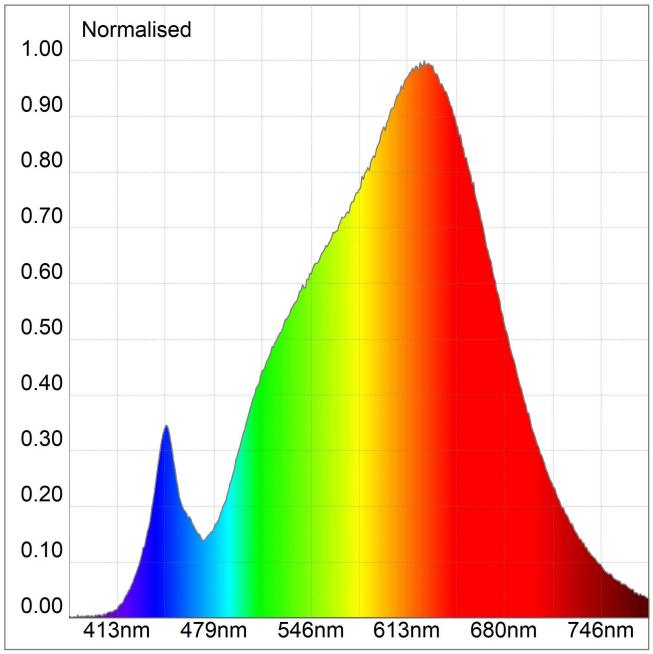


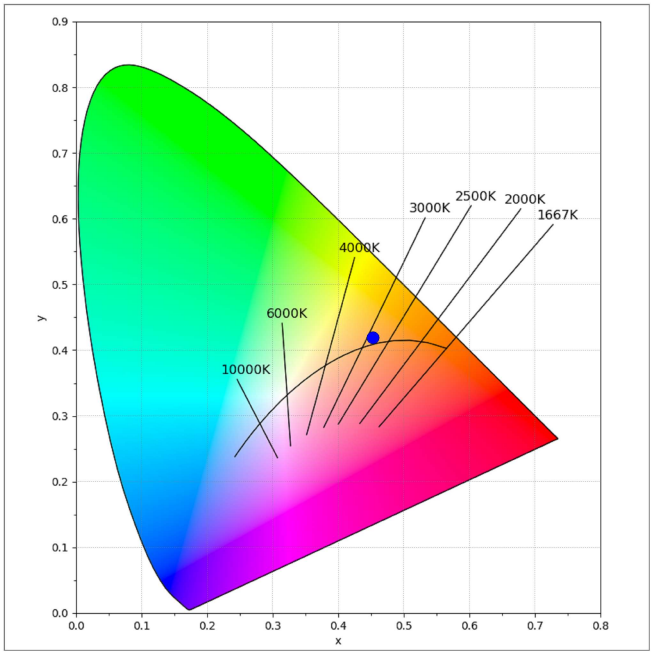


Luminaire
Code 12603026xxxU
Name ARID_A/02_LEFT
Measurem.
Code CL092A25D008GPE2ç
Name ARID_A/02_LEFT

Luminaire Flux	95 lm	Luminaire Power	3.0 W	Efficacy	31.470 lm/W	Efficiency	100.00%
Source Flux	95 lm	Maximum value	483.49 cd	Position	C=270.00 G=87.50	CG	Asymmetrical


CRI Graphs

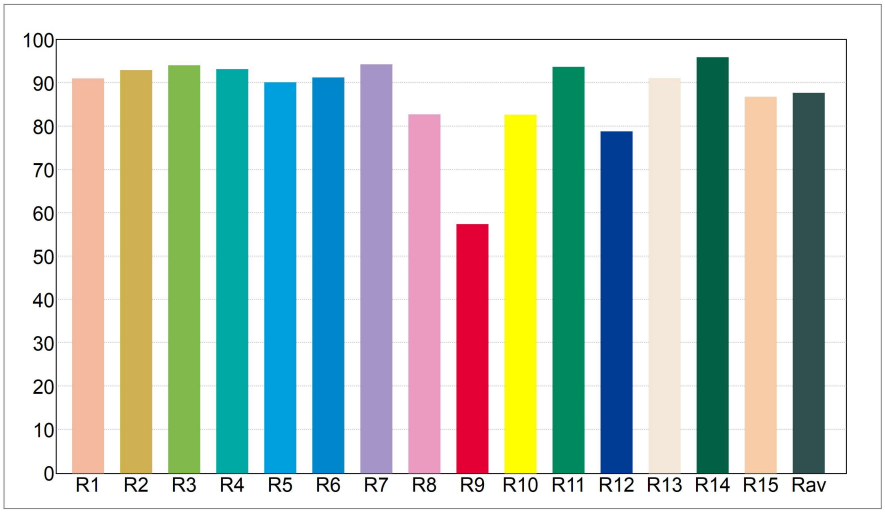

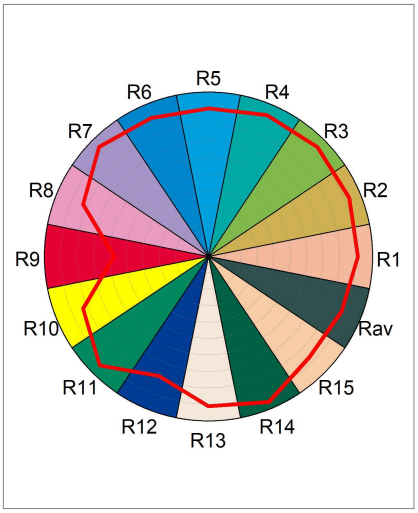


Luminaire
Code 12603026xxxU
Name ARID_A/02_LEFT
Measurem.
Code CL092A25D008GPE2ç
Name ARID_A/02_LEFT


Luminaire Flux	95 lm	Luminaire Power	3.0 W	Efficacy	31.470 lm/W	Efficiency	100.00%
Source Flux	95 lm	Maximum value	483.49 cd	Position	C=270.00 G=87.50	CG	Asymmetrical

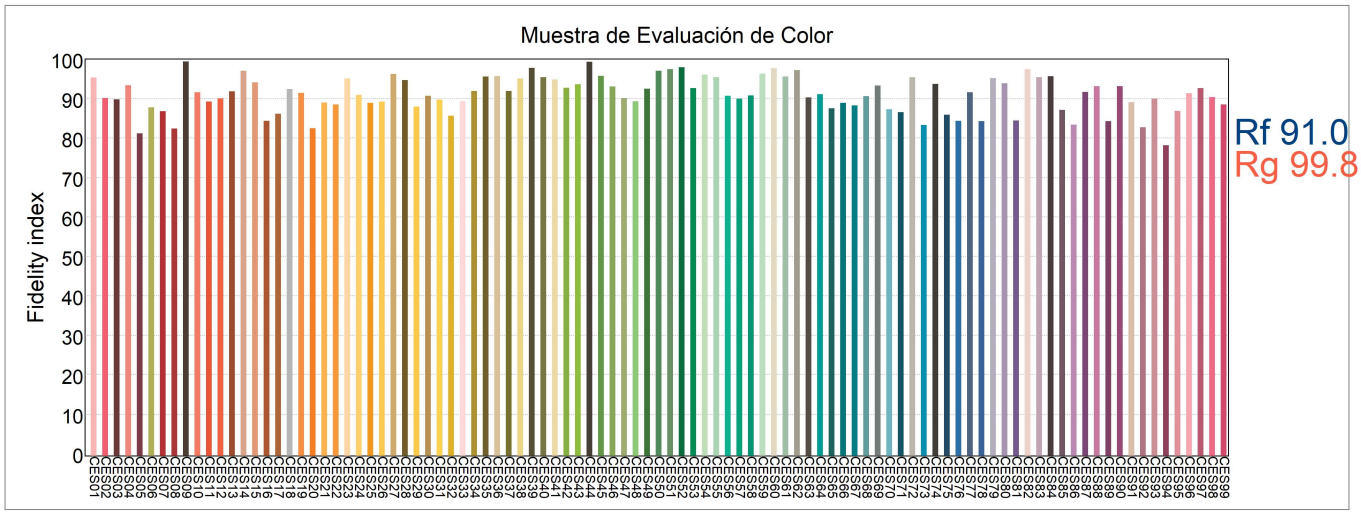


Chromatic Coordinates (a', b') 99 CES

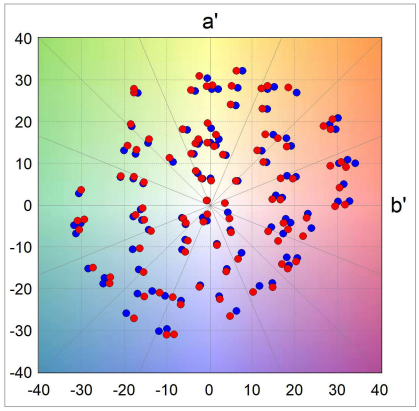


Color Vector Graphic

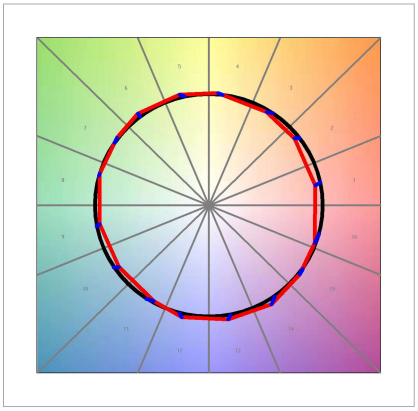


Color Distorsion Graphic

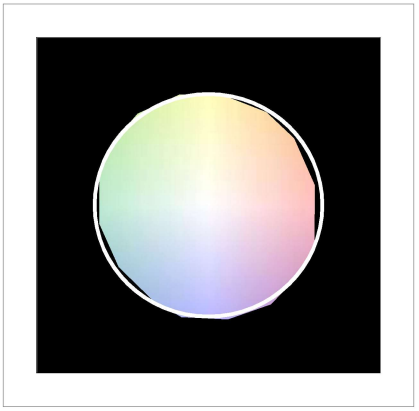

Rg vs Rf Plot

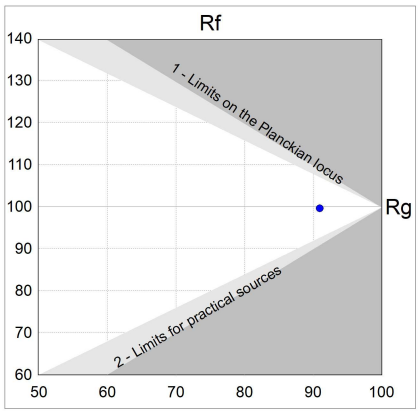

Gamut Polygon

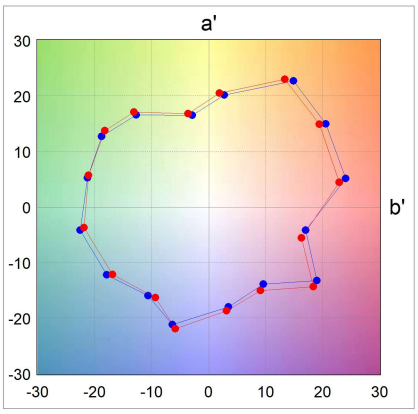

Bin Deviation

