Luminaire		Measurem.		Lamp	
Code	0324905 CU	Code	0324905 CU	Code	49885
Name	PLAFONET 6x20W CFL E26 cream U	Name	PLAFONET 6x20W CFL E26 cream U	Number	6
Line	- BOVER	Date	03-02-2012	Position	Universal

Efficiency	66.69%	Coordinate system	CG	Total Flux	7200.00 lm
Maximum value	185.83 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	


Round Luminaire	Diam.	950 mm	Height	200 mm	
Round Luminous Area	Diam.	950 mm	Height	200 mm	
Horizontal Luminous Area	0.708822 m2		Emitting area on Plane 180°	0.190000 m2	
Emitting area on Plane 0°	0.190000 m2		Emitting area on Plane 270°	0.190000 m2	
Emitting area on Plane 90°	0.190000 m2		Glare area at 76°	0.355836 m2	
Symmetry Type	Double Symmetrical		Maximum Gamma Angle	180	
Measurement Distance	6.44		Measurement Flux	8955.00 lm	
Operator	Asselum T2		Source voltage	120.00 V	
Temperature	20.00 °C		Source current		
Humidity	50.00 %		Photocell	PRC	
Notes					

Luminaire Lamps

Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty
- BOVER	49885	FLE20TBX/2/SW/CD	1200.00	20.00	6

C.I.E.	45 76 93 83 67	D DIN 5040	B31
F UTE	0.55 E + 0.12 T	B NBN	BZ 5


Diam=950mm



C Halfplanes

180.0 — 0.0

270.0 — 90.0

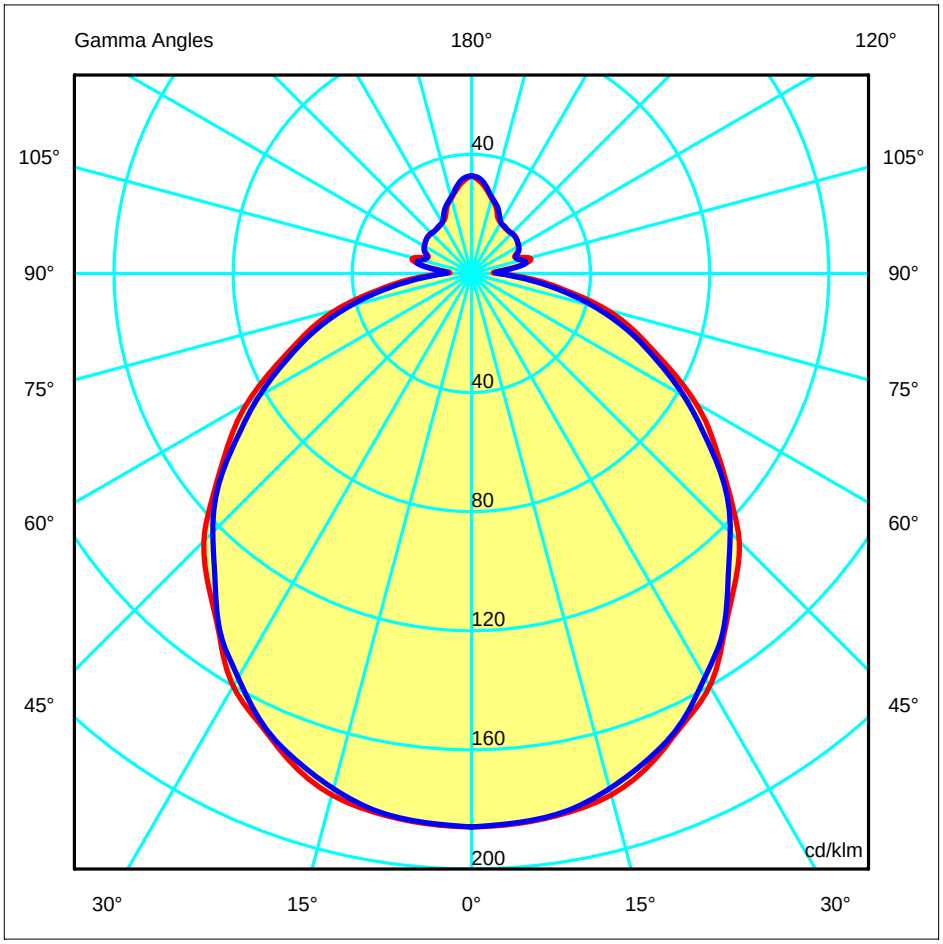

ULOR	11.52 %
DLOR	55.16 %
RN	17.28 %

Luminaire		**Measurem.**		**Lamp**	
Code	0324905 CU	Code	0324905 CU	Code	49885
Name	PLAFONET 6x20W CFL E26 cream U	Name	PLAFONET 6x20W CFL E26 cream U	Number	6
Line	- BOVER	Date	03-02-2012	Position	Universal

Efficiency	66.69%	Coordinate system	CG	Total Flux	7200.00 lm
Maximum value	185.83 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	


Luminous Intensity Table cd/klm **Table 1/1**

	C 0.00	C 15.00	C 30.00	C 45.00	C 60.00	C 75.00	C 90.00
G 0.0	185.83	185.83	185.83	185.83	185.83	185.83	185.83
G 5.0	185.32	185.26	185.15	185.02	184.84	184.92	184.98
G 10.0	183.93	183.36	184.39	183.52	183.40	183.08	183.32
G 15.0	181.25	178.92	179.75	179.38	179.14	178.90	179.08
G 20.0	175.45	173.95	174.16	173.88	173.83	173.52	173.54
G 25.0	167.38	167.11	167.66	166.88	166.48	166.74	166.55
G 30.0	160.04	156.85	156.94	156.74	156.65	156.50	156.69
G 35.0	147.86	147.41	147.85	147.24	147.29	147.25	147.11
G 40.0	137.21	134.85	134.49	134.50	134.94	134.54	134.02
G 45.0	127.10	123.05	123.13	123.03	122.97	123.02	122.84
G 50.0	112.46	111.49	111.37	111.27	111.18	111.31	110.99
G 55.0	99.61	96.43	95.73	96.30	96.53	95.60	96.01
G 60.0	86.96	82.49	82.88	82.90	82.05	83.15	82.42
G 65.0	71.89	68.92	68.45	68.64	68.57	68.99	68.45
G 70.0	59.23	55.70	55.43	55.92	56.28	55.46	55.95
G 75.0	47.07	42.49	43.04	42.70	42.42	42.50	42.38
G 80.0	31.69	28.43	27.89	28.55	28.68	28.27	28.62
G 85.0	19.97	15.99	16.20	15.99	15.90	16.38	16.88
G 90.0	8.75	8.48	8.72	8.63	8.58	8.59	8.62
G 95.0	9.08	11.55	11.42	11.28	11.20	11.36	10.45
G100.0	17.65	19.17	19.51	20.25	18.93	20.06	18.05
G105.0	20.23	19.02	18.12	18.63	17.64	18.47	17.35
G110.0	15.73	16.37	16.35	16.28	15.93	16.26	15.77
G115.0	17.10	17.65	17.70	17.65	17.73	17.73	17.45
G120.0	18.16	18.81	18.73	18.51	18.69	18.75	18.30
G125.0	18.81	19.32	19.17	19.30	19.20	19.26	18.86
G130.0	19.25	19.51	19.24	19.65	19.36	19.45	19.13
G135.0	19.23	19.24	19.06	19.47	19.20	19.24	19.01
G140.0	18.94	18.94	18.91	19.26	19.04	19.08	18.90
G145.0	19.07	19.51	19.46	19.80	19.62	19.65	19.37
G150.0	19.71	20.08	19.83	20.29	19.97	20.23	19.78
G155.0	20.81	22.18	22.00	22.45	22.37	22.20	22.07
G160.0	23.97	24.64	24.87	24.80	24.64	24.86	24.58
G165.0	26.09	26.79	26.63	26.66	26.64	26.78	26.46
G170.0	28.77	29.50	29.87	29.49	29.55	29.65	29.45
G175.0	31.13	32.03	32.41	31.84	32.16	32.05	32.04
G180.0	32.93	33.22	32.99	32.98	32.84	33.09	32.82

Luminaire		Measurem.		Lamp	
Code	0324905 CU	Code	0324905 CU	Code	49885
Name	PLAFONET 6x20W CFL E26 cream U	Name	PLAFONET 6x20W CFL E26 cream U	Number	6
Line	- BOVER	Date	03-02-2012	Position	Universal

Efficiency	66.69%	Coordinate system	CG	Total Flux	7200.00 lm
Maximum value	185.83 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	


Diam=950mm



C Halfplanes

180.0 0.0


270.0 90.0

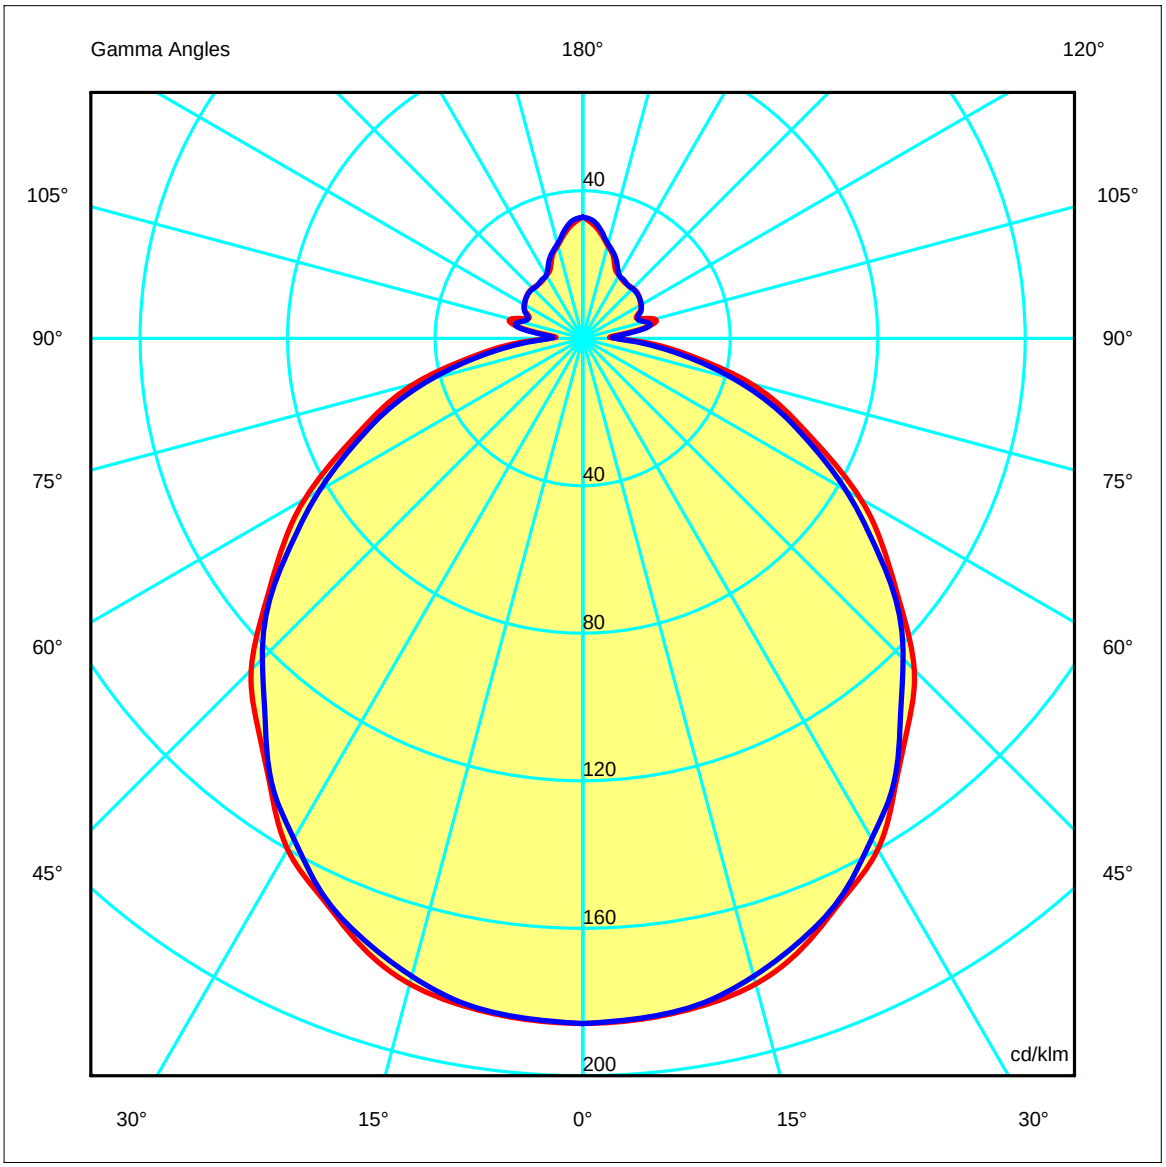

Luminaire		Measurem.		Lamp	
Code	0324905 CU	Code	0324905 CU	Code	49885
Name	PLAFONET 6x20W CFL E26 cream U	Name	PLAFONET 6x20W CFL E26 cream U	Number	6
Line	- BOVER	Date	03-02-2012	Position	Universal

Efficiency	66.69%	Coordinate system	CG	Total Flux	7200.00 lm
Maximum value	185.83 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	

Diam=950mm



C Halfplanes

180.0 — 0.0

270.0 — 90.0



Luminaire		Measurem.		Lamp	
Code	0324905 CU	Code	0324905 CU	Code	49885
Name	PLAFONET 6x20W CFL E26 cream U	Name	PLAFONET 6x20W CFL E26 cream U	Number	6
Line	- BOVER	Date	03-02-2012	Position	Universal

Efficiency	66.69%	Coordinate system	CG	Total Flux	7200.00 lm
Maximum value	185.83 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	12.1	13.2	12.6	13.8	14.3	12.1	13.2	12.6	13.7	14.3
x=2H y=3H	13.6	14.7	14.2	15.2	15.7	13.6	14.6	14.1	15.1	15.7
x=2H y=4H	14.3	15.3	14.9	15.8	16.4	14.2	15.1	14.8	15.7	16.4
x=2H y=6H	14.8	15.7	15.4	16.3	16.8	14.6	15.5	15.2	16.1	16.8
x=2H y=8H	15.0	15.8	15.6	16.4	16.9	14.8	15.6	15.4	16.2	16.9
x=2H y=12H	15.1	15.9	15.7	16.5	17.0	14.9	15.7	15.5	16.3	17.0
x=4H y=2H	12.8	13.7	13.3	14.3	14.9	12.7	13.7	13.3	14.2	14.9
x=4H y=3H	14.5	15.3	15.1	15.9	16.5	14.4	15.2	15.0	15.8	16.5
x=4H y=4H	15.2	16.0	15.9	16.6	17.2	15.2	15.9	15.8	16.5	17.2
x=4H y=6H	15.8	16.4	16.5	17.1	17.7	15.7	16.3	16.4	17.0	17.7
x=4H y=8H	16.0	16.6	16.7	17.3	17.9	15.9	16.5	16.6	17.1	17.9
x=4H y=12H	16.2	16.7	16.9	17.4	18.1	16.1	16.6	16.8	17.3	18.1
x=8H y=4H	15.5	16.1	16.2	16.8	17.5	15.5	16.0	16.1	16.7	17.5
x=8H y=6H	16.2	16.7	16.9	17.4	18.1	16.2	16.6	16.9	17.3	18.1
x=8H y=8H	16.5	16.9	17.2	17.6	18.4	16.4	16.8	17.1	17.6	18.4
x=8H y=12H	16.8	17.1	17.5	17.8	18.6	16.6	17.0	17.4	17.7	18.6
x=12H y=4H	15.5	16.1	16.2	16.7	17.5	15.5	16.0	16.2	16.7	17.5
x=12H y=6H	16.3	16.7	17.0	17.4	18.1	16.2	16.6	16.9	17.3	18.1
x=12H y=8H	16.6	17.0	17.4	17.7	18.4	16.5	16.9	17.3	17.6	18.4

Luminaire		Measurem.		Lamp	
Code	0324905 CU	Code	0324905 CU	Code	49885
Name	PLAFONET 6x20W CFL E26 cream U	Name	PLAFONET 6x20W CFL E26 cream U	Number	6
Line	- BOVER	Date	03-02-2012	Position	Universal

Efficiency	66.69%	Coordinate system	CG	Total Flux	7200.00 lm
Maximum value	185.83 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	

Total Flux=7200.00 Luminaire Flux=4801.34

RI	0.60	0.80	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	10.00	20.00
DRR	0.29	0.38	0.45	0.52	0.57	0.66	0.72	0.76	0.81	0.84	0.91	0.96
RC	5	5	5	5	5	5	5	5	5	6	6	6

Zonal Flux per 1000 Lumen

Y°	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
ZF(Y)	18	68	145	237	332	419	487	533	552	565	584	602	619	634	646	656	664	667

CIE Flux Codes

45 76 93 83 67

C.I.E.	5/5/5/5/5/5/5/5/6/6/6	LOR	66.68532 %
D DIN 5040	B31	ULOR	11.52131 %
F UTE	0.55 E + 0.12 T	DLOR	55.16401 %
B NBN	BZ 5	UFF	17.27714 %
RN	17.27714 %	DFF	82.72286 %
BLF	1.0	FFR	20.88556 %



Zonal Flux				
Gamma °	Flux	Sum lm	Flux [%]	Sum [%]
0°	0.00	0.00	0.00%	0.00 %
5°	4.43	4.43	0.66 %	0.66 %
10°	13.19	17.62	1.98 %	2.64 %
15°	21.53	39.15	3.23 %	5.87 %
20°	29.12	68.27	4.37 %	10.24 %
25°	35.76	104.03	5.36 %	15.60 %
30°	41.00	145.03	6.15 %	21.75 %
35°	44.83	189.86	6.72 %	28.47 %
40°	47.09	236.95	7.06 %	35.53 %
45°	47.80	284.75	7.17 %	42.70 %
50°	47.44	332.19	7.11 %	49.81 %
55°	45.18	377.37	6.78 %	56.59 %
60°	41.47	418.84	6.22 %	62.81 %
65°	36.95	455.79	5.54 %	68.35 %
70°	31.66	487.45	4.75 %	73.10 %
75°	25.89	513.33	3.88 %	76.98 %
80°	19.17	532.50	2.87 %	79.85 %
85°	12.27	544.77	1.84 %	81.69 %
90°	6.87	551.64	1.03 %	82.72 %
95°	5.40	557.04	0.81 %	83.53 %
100°	8.26	565.29	1.24 %	84.77 %
105°	10.10	575.39	1.51 %	86.28 %
110°	9.04	584.44	1.36 %	87.64 %
115°	8.55	592.99	1.28 %	88.92 %
120°	8.81	601.80	1.32 %	90.24 %
125°	8.74	610.54	1.31 %	91.56 %
130°	8.39	618.93	1.26 %	92.81 %
135°	7.80	626.73	1.17 %	93.98 %
140°	7.08	633.81	1.06 %	95.05 %
145°	6.43	640.25	0.96 %	96.01 %
150°	5.83	646.08	0.87 %	96.88 %
155°	5.33	651.41	0.80 %	97.68 %
160°	4.91	656.31	0.74 %	98.42 %
165°	4.23	660.54	0.63 %	99.05 %
170°	3.33	663.87	0.50 %	99.55 %
175°	2.20	666.08	0.33 %	99.88 %
180°	0.78	666.85	0.12 %	100.00 %

Luminaire		Measurem.		Lamp	
Code	0324905 CU	Code	0324905 CU	Code	49885
Name	PLAFONET 6x20W CFL E26 cream U	Name	PLAFONET 6x20W CFL E26 cream U	Number	6
Line	- BOVER	Date	03-02-2012	Position	Universal


Efficiency	66.69%	Coordinate system	CG	Total Flux	7200.00 lm
Maximum value	185.83 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.59	3.17	4.76	6.34	7.93	OC	1.49	2.98	4.46	5.95	7.44
OB	1.59	3.17	4.76	6.34	7.93	OD	1.49	2.98	4.46	5.95	7.44

Luminous Intensities [cd/klm]

	0	5	15	25	35	45	55	65	75	85
OA	1337.99	1334.32	1304.99	1205.13	1064.60	915.14	717.22	517.64	338.88	143.80
OB	1337.99	1334.32	1304.99	1205.13	1064.60	915.14	717.22	517.64	338.88	143.80
OC	1337.99	1331.85	1289.38	1199.14	1059.16	884.47	691.29	492.84	305.10	121.51
OD	1337.99	1331.85	1289.38	1199.14	1059.16	884.47	691.29	492.84	305.10	121.51

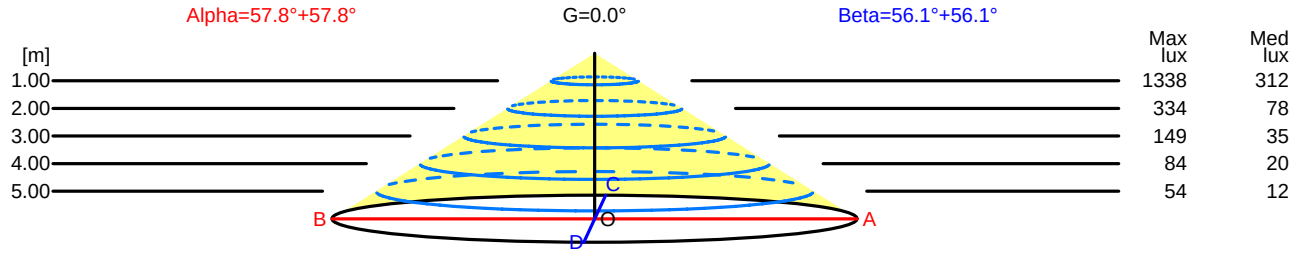

H[m]	D[m]	Max lux	Med lux	Alpha=57.8°+57.8° G=0.0
1.00	3.17	1338	312	
2.00	6.34	334	78	
3.00	9.51	149	35	
4.00	12.68	84	20	
5.00	15.85	54	12	


H[m]	D[m]	Max lux	Med lux	Beta=56.1°+56.1° G=0.0
1.00	2.98	1338	312	
2.00	5.95	334	78	
3.00	8.93	149	35	
4.00	11.90	84	20	
5.00	14.88	54	12	

Luminaire		Measurem.		Lamp	
Code	0324905 CU	Code	0324905 CU	Code	49885
Name	PLAFONET 6x20W CFL E26 cream U	Name	PLAFONET 6x20W CFL E26 cream U	Number	6
Line	- BOVER	Date	03-02-2012	Position	Universal

Efficiency	66.69%	Coordinate system	CG	Total Flux	7200.00 lm
Maximum value	185.83 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=2.50m

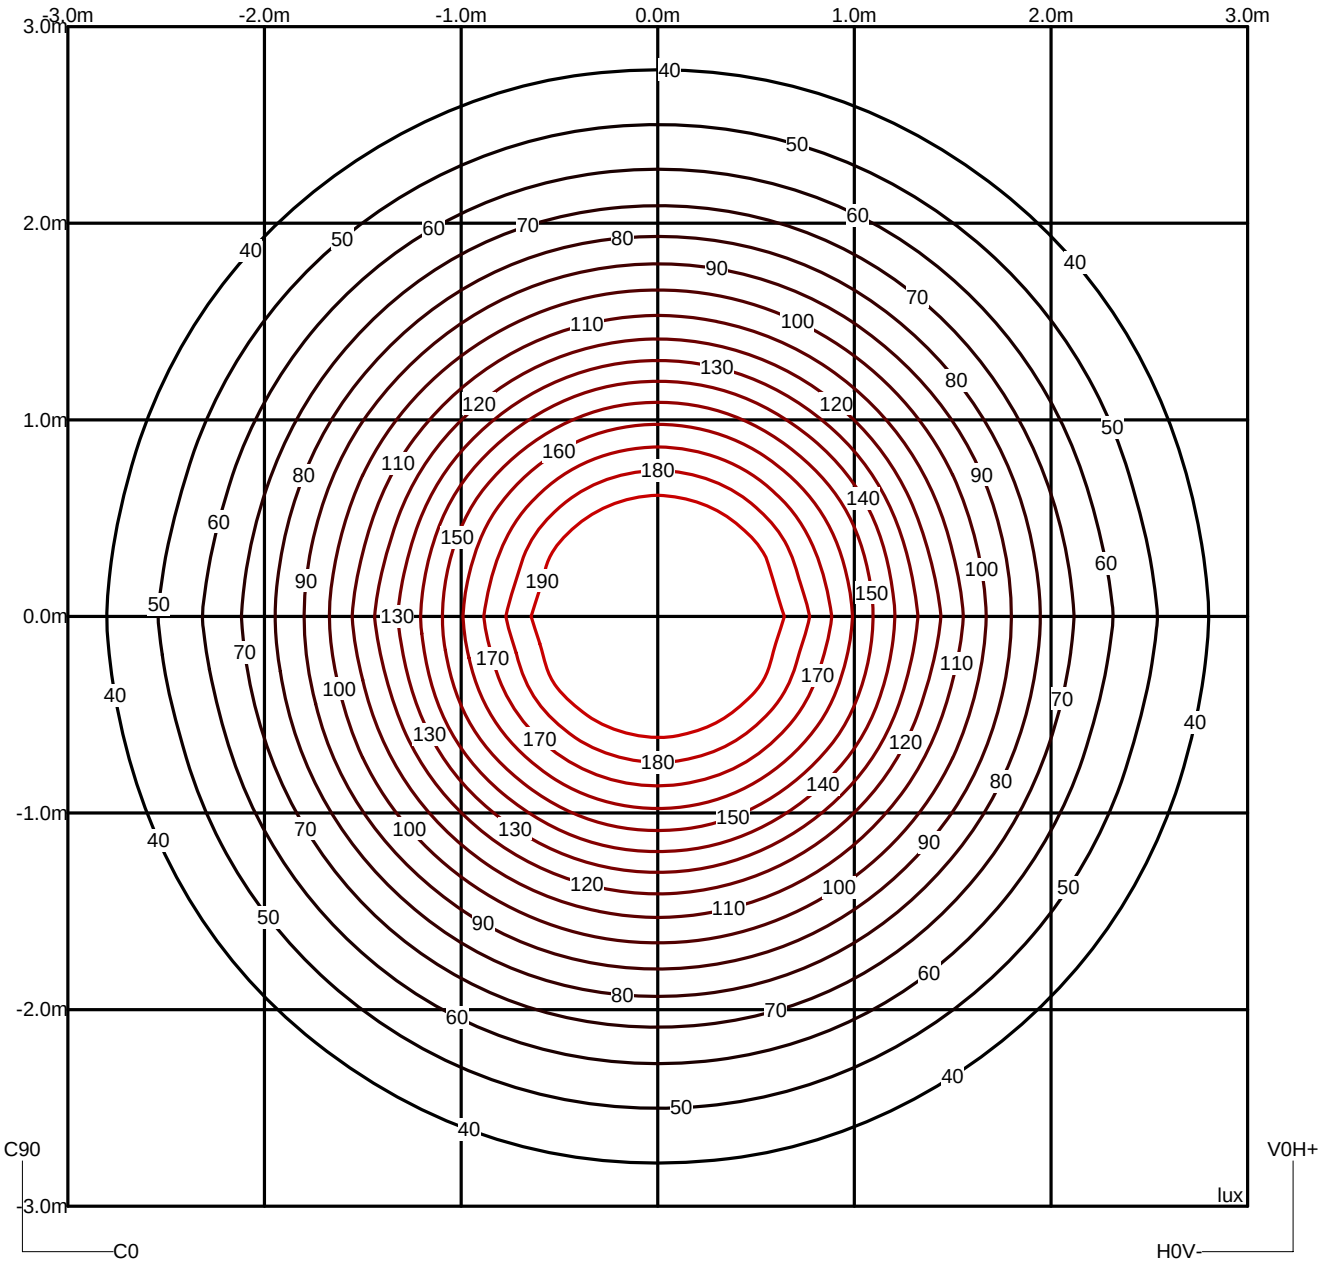

Luminaire		**Measurem.**		**Lamp**	
Code	0324905 CU	Code	0324905 CU	Code	49885
Name	PLAFONET 6x20W CFL E26 cream U	Name	PLAFONET 6x20W CFL E26 cream U	Number	6
Line	- BOVER	Date	03-02-2012	Position	Universal
Efficiency	66.69%	Coordinate system	CG	Total Flux	7200.00 lm
Maximum value	185.83 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	

Utilizations CIE

Mounting Direct Normalization Normalised Suspension Ratio 0.3 Standard CIE Settings

Ceiling

K	8873	8773	8871	8771	7773	7771	7753	7553	7751	7551	7731	7331	7711	7111	5551	5531	5331	5511	5111	3331	3311	1111	0000
0.60	223	200	195	176	190	168	145	123	130	111	105	79	87	59	104	85	75	71	57	71	60	52	43
0.80	251	230	209	193	219	184	170	149	146	128	118	94	98	72	120	99	89	82	68	85	71	62	51
1.00	271	252	215	201	239	193	189	169	156	140	128	105	106	82	131	109	100	92	78	95	80	72	58
1.25	287	271	218	206	258	198	209	189	163	149	136	116	115	92	140	119	110	101	88	105	90	81	64
1.50	299	284	218	208	271	201	224	206	168	156	143	124	122	100	147	126	118	108	96	113	98	89	69
2.00	315	302	215	208	288	201	246	230	174	164	151	135	132	113	155	136	129	120	109	124	110	101	77
2.50	324	314	212	206	300	200	262	248	176	168	156	143	139	123	160	143	137	128	118	132	119	111	82
3.00	331	322	209	204	308	199	274	261	178	171	160	149	144	130	163	148	143	134	126	138	125	118	86
4.00	340	333	205	202	319	197	291	280	180	175	165	156	152	140	168	155	151	143	136	146	135	128	92
5.00	346	340	202	200	326	195	302	293	181	177	169	161	157	147	170	159	156	149	143	151	142	135	96
10.00	358	355	195	194	340	191	326	321	183	181	176	172	169	163	175	169	167	163	159	162	157	151	105
20.00	364	362	191	190	348	187	340	337	183	182	179	177	176	173	178	174	173	171	169	169	166	161	110

Wall

K	8873	8773	8871	8771	7773	7771	7753	7553	7751	7551	7731	7331	7711	7111	5551	5531	5331	5511	5111	3331	3311	1111	0000
0.60	295	283	259	250	276	245	218	208	197	189	166	156	142	133	185	157	153	136	131	151	132	129	117
0.80	336	323	287	278	314	271	256	244	226	218	194	183	170	159	211	183	179	162	157	176	157	152	138
1.00	364	352	304	296	340	288	284	272	246	237	215	203	190	179	229	202	198	181	175	193	174	169	152
1.25	389	378	317	310	364	301	311	299	263	255	234	222	210	198	245	220	215	200	193	209	191	185	166
1.50	408	397	326	320	382	310	331	320	276	268	248	237	225	213	257	233	229	214	207	222	205	197	177
2.00	430	420	333	328	402	318	358	347	289	282	265	254	244	232	269	248	244	231	225	235	220	211	188
2.50	443	435	336	332	415	322	376	365	297	291	275	266	257	246	276	258	255	243	237	244	231	220	195
3.00	452	445	337	334	423	323	389	379	301	296	282	274	266	255	281	265	261	251	245	250	238	226	200
4.00	467	461	342	339	438	329	409	401	311	307	295	288	281	272	290	277	274	265	260	261	250	237	209
5.00	479	473	346	344	449	333	424	416	318	315	305	298	292	284	297	286	283	275	271	269	260	246	216
10.00	505	502	357	356	475	345	460	455	336	334	328	325	320	315	315	308	307	302	299	290	284	268	235
20.00	518	516	362	361	487	350	479	476	345	344	341	338	336	333	324	320	319	316	314	301	297	280	245

Working Pl.

K	8873	8773	8871	8771	7773	7771	7753	7553	7751	7551	7731	7331	7711	7111	5551	5531	5331	5511	5111	3331	3311	1111	0000
0.60	362	349	338	327	341	320	269	259	259	251	218	208	189	179	245	208	205	182	177	202	177	174	163
0.80	431	417	397	386	405	377	332	320	317	307	274	262	242	230	298	261	256	233	226	251	225	220	208
1.00	486	471	443	432	456	421	385	371	364	353	322	308	289	275	341	305	300	277	269	293	267	260	247
1.25	538	523	485	475	504	462	437	422	409	398	368	354	336	320	383	349	343	321	313	333	309	299	286
1.50	577	563	515	506	541	492	477	462	443	433	405	389	373	356	415	382	377	356	347	365	342	330	316
2.00	634	621	558	551	595	535	539	524	494	484	460	445	431	414	462	434	429	410	401	413	393	378	364
2.50	671	660	585	579	630	562	580	567	527	518	497	483	471	454	494	469	464	447	438	446	427	410	396
3.00	697	687	604	599	656	581	611	598	550	542	523	511	500	484	516	494	489	474	466	469	452	433	419
4.00	731	723	627	623	688	604	651	639	580	573	557	546	537	523	544	526	521	509	502	498	484	462	447
5.00	752	745	641	637	708	618	676	666	598	592	579	569	561	549	561	546	542	532	525	517	505	481	465
10.00	797	793	669	668	752	648	733	727	636	633	625	620	615	607	599	590	588	581	577	557	550	521	505
20.00	821	819	684	684	775	664	765	762	658	656	652	649	646	641	619	615	613	610	607	580	576	544	527

LM53 SHR C0-C180: 1.262 SHR C90-C270: 1.250 SHR Square: 1.370

Luminaire		Measurem.		Lamp	
Code	0324905 CU	Code	0324905 CU	Code	49885
Name	PLAFONET 6x20W CFL E26 cream U	Name	PLAFONET 6x20W CFL E26 cream U	Number	6
Line	- BOVER	Date	03-02-2012	Position	Universal


Efficiency	66.69%	Coordinate system	CG	Total Flux	7200.00 lm
Maximum value	185.83 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	

Average Luminance [cd/m²]

	45°	50°	55°	60°	65°	70°	75°	80°	85°	
0.0°	1440	1347	1276	1206	1097	1013	923	735	573	---
90.0°	1392	1329	1230	1143	1045	957	831	664	484	---

Flush mounted or transveral view


		Illumination(lx)										
A	A	2000	1000	750	500		<300					1.15
B	1		2000	1500	1000	750	500	<300				1.5
C					2000		1000	500	<300			1.85
D	2						2000	1000	500	<300		2.2
E	3							2000	1000	500	<300	2.55

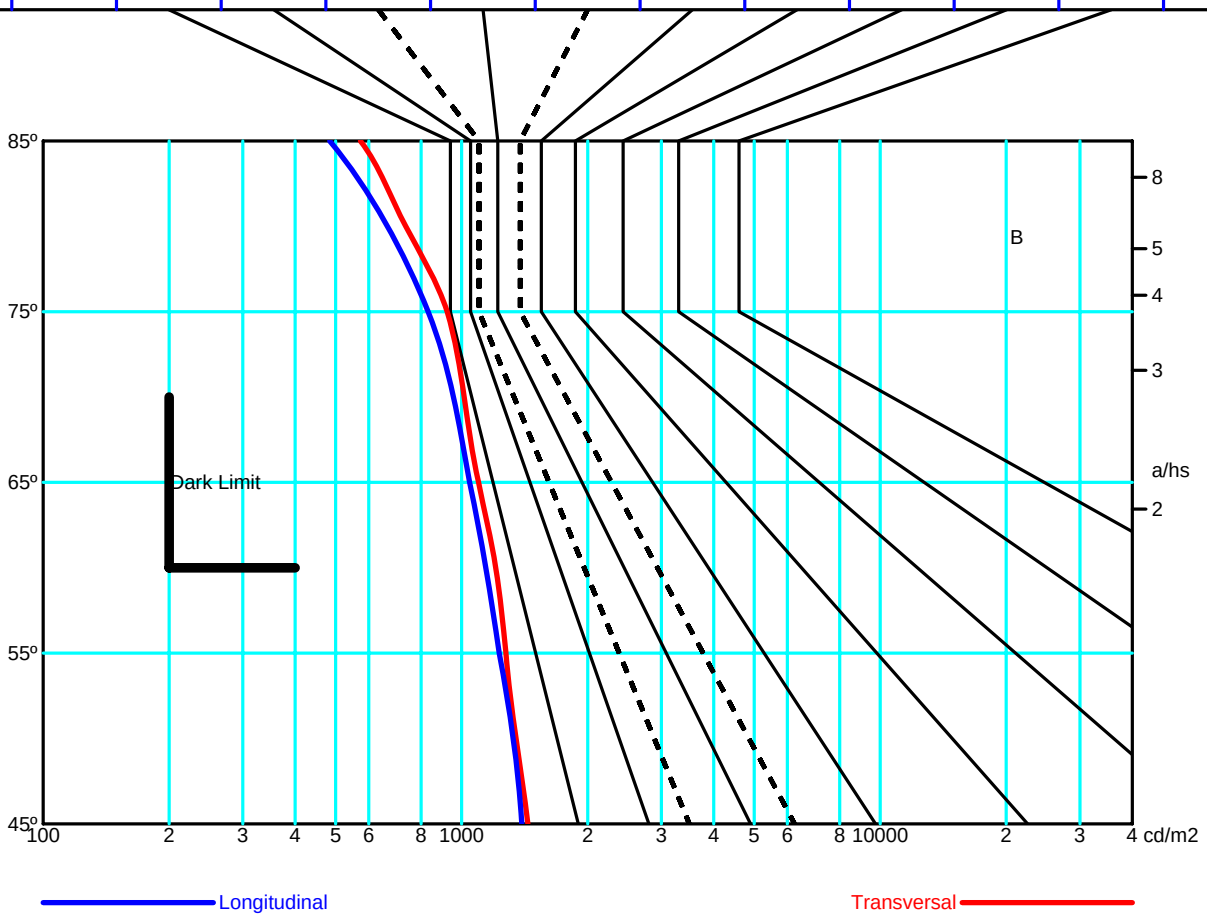

Luminaire		Measurem.		Lamp	
Code	0324905 CU	Code	0324905 CU	Code	49885
Name	PLAFONET 6x20W CFL E26 cream U	Name	PLAFONET 6x20W CFL E26 cream U	Number	6
Line	- BOVER	Date	03-02-2012	Position	Universal

Efficiency	66.69%	Coordinate system	CG	Total Flux	7200.00 lm
Maximum value	185.83 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	

Luminance

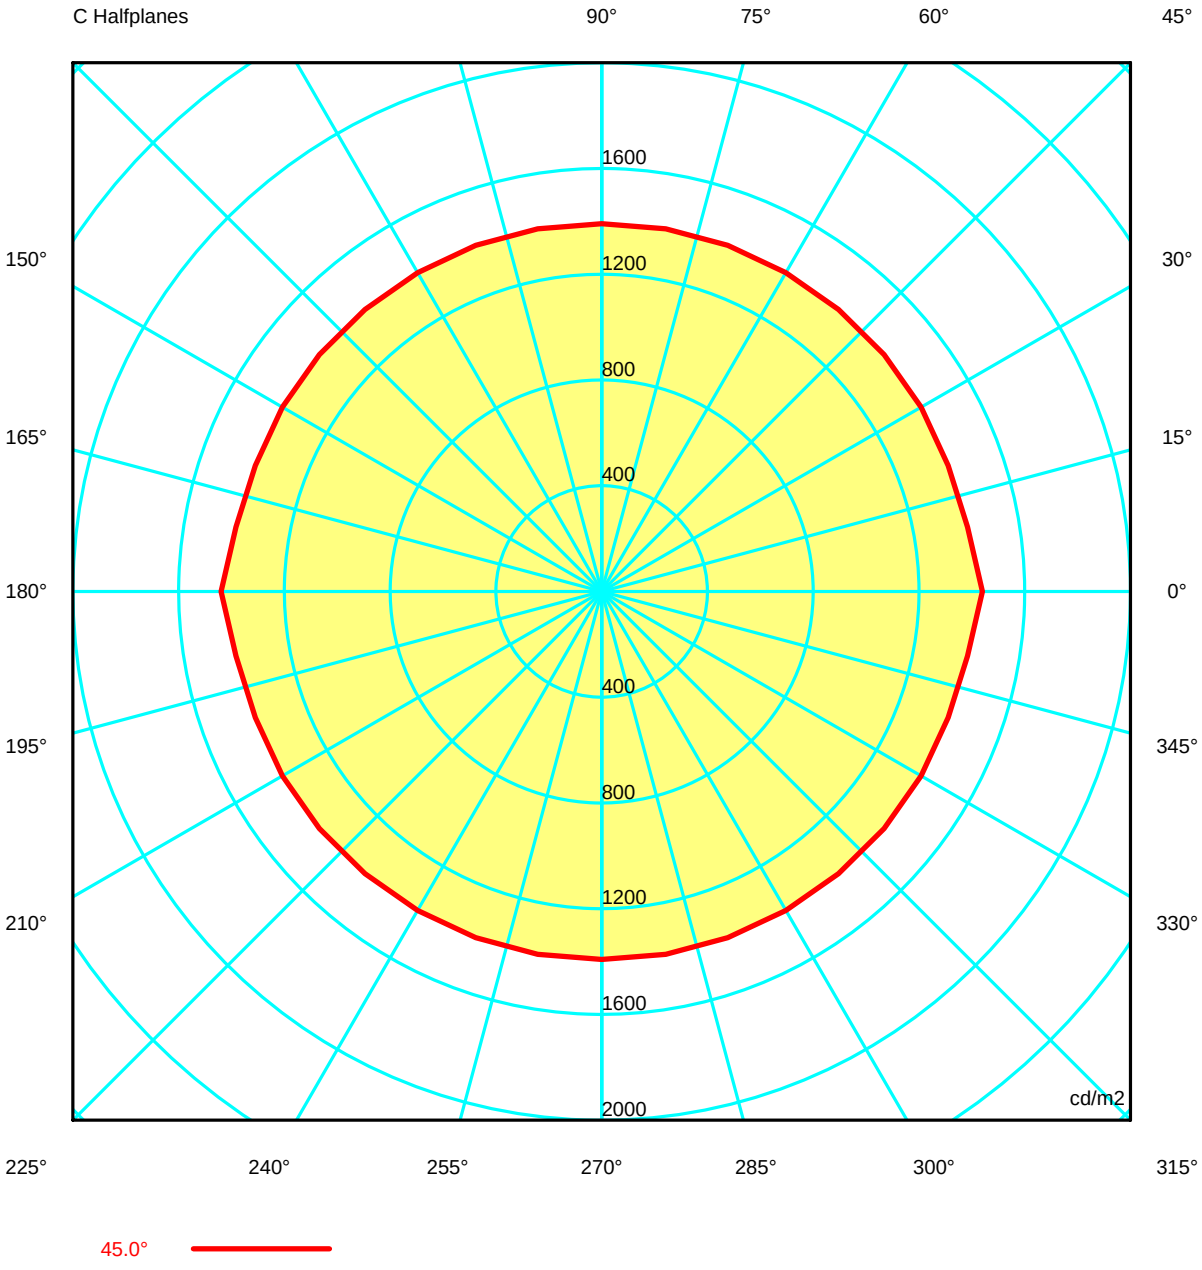

Luminaire		Measurem.		Lamp	
Code	0324905 CU	Code	0324905 CU	Code	49885
Name	PLAFONET 6x20W CFL E26 cream U	Name	PLAFONET 6x20W CFL E26 cream U	Number	6
Line	- BOVER	Date	03-02-2012	Position	Universal

Efficiency	66.69%	Coordinate system	CG	Total Flux	7200.00 lm
Maximum value	185.83 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	

Luminance cd/m2 **Table 1/3**

	C 0.00	C 10.00	C 20.00	C 30.00	C 40.00	C 50.00	C 60.00	C 70.00	C 80.00	C 90.00	C 100.00	C 110.00	C 120.00
G 0.0	1887.63	1887.63	1887.63	1887.63	1887.63	1887.63	1887.63	1887.63	1887.63	1887.63	1887.63	1887.63	1887.63
G 5.0	1846.35	1845.96	1845.37	1844.61	1843.84	1842.60	1841.52	1841.88	1842.58	1842.93	1842.58	1841.88	1841.52
G 10.0	1811.49	1805.66	1809.27	1816.01	1810.88	1807.07	1806.32	1804.11	1803.24	1805.49	1803.24	1804.11	1806.32
G 15.0	1778.30	1759.63	1756.45	1763.60	1762.12	1758.66	1757.62	1755.82	1755.37	1757.02	1755.37	1755.82	1757.62
G 20.0	1727.92	1716.32	1713.89	1715.22	1713.64	1712.12	1711.99	1709.96	1708.61	1709.13	1708.61	1709.96	1711.99
G 25.0	1667.52	1664.56	1666.84	1670.32	1665.82	1660.11	1658.60	1660.37	1661.04	1659.23	1661.04	1660.37	1658.60
G 30.0	1625.56	1600.55	1593.46	1594.09	1593.22	1591.46	1591.14	1589.98	1589.89	1591.51	1589.89	1589.98	1591.14
G 35.0	1543.77	1539.38	1540.61	1543.64	1539.59	1537.48	1537.79	1537.83	1536.90	1535.88	1536.90	1537.83	1537.79
G 40.0	1485.30	1466.24	1456.68	1455.83	1455.46	1457.67	1460.72	1458.57	1454.43	1450.82	1454.43	1458.57	1460.72
G 45.0	1439.89	1404.55	1394.23	1394.83	1394.13	1393.09	1393.03	1393.63	1393.25	1391.64	1393.25	1393.63	1393.03
G 50.0	1346.88	1338.12	1334.75	1333.78	1333.04	1332.02	1331.59	1332.92	1332.49	1329.34	1332.49	1332.92	1331.59
G 55.0	1275.73	1245.78	1228.52	1226.00	1230.33	1235.93	1236.28	1227.76	1224.04	1229.61	1224.04	1227.76	1236.28
G 60.0	1206.43	1158.41	1146.28	1149.94	1153.06	1146.17	1138.32	1148.85	1153.55	1143.47	1153.55	1148.85	1138.32
G 65.0	1097.26	1063.53	1045.77	1044.64	1047.16	1046.92	1046.45	1051.41	1051.88	1044.69	1051.88	1051.41	1046.45
G 70.0	1012.98	967.57	946.06	947.96	953.30	960.19	962.65	952.63	948.58	956.99	948.58	952.63	962.65
G 75.0	923.42	853.17	837.27	844.44	842.43	834.33	832.18	833.39	833.53	831.39	833.53	833.39	832.18
G 80.0	735.45	679.59	649.04	647.41	657.61	665.93	665.58	658.42	656.91	664.22	656.91	658.42	665.58
G 85.0	572.79	484.37	460.50	464.48	460.57	455.61	455.97	464.29	474.68	484.01	474.68	464.29	455.97
G 90.0	331.39	322.51	323.63	330.35	329.08	325.84	325.17	325.33	325.83	326.55	325.83	325.33	325.17

Luminaire		**Measurem.**		**Lamp**	
Code	0324905 CU	Code	0324905 CU	Code	49885
Name	PLAFONET 6x20W CFL E26 cream U	Name	PLAFONET 6x20W CFL E26 cream U	Number	6
Line	- BOVER	Date	03-02-2012	Position	Universal

Efficiency	66.69%	Coordinate system	CG	Total Flux	7200.00 lm
Maximum value	185.83 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	

Luminance cd/m2 **Table 2/3**

	C 130.00	C 140.00	C 150.00	C 160.00	C 170.00	C 180.00	C 190.00	C 200.00	C 210.00	C 220.00	C 230.00	C 240.00	C 250.00
G 0.0	1887.63	1887.63	1887.63	1887.63	1887.63	1887.63	1887.63	1887.63	1887.63	1887.63	1887.63	1887.63	1887.63
G 5.0	1842.60	1843.84	1844.61	1845.37	1845.96	1846.35	1845.96	1845.37	1844.61	1843.84	1842.60	1841.52	1841.88
G 10.0	1807.07	1810.88	1816.01	1809.27	1805.66	1811.49	1805.66	1809.27	1816.01	1810.88	1807.07	1806.32	1804.11
G 15.0	1758.66	1762.12	1763.60	1756.45	1759.63	1778.30	1759.63	1756.45	1763.60	1762.12	1758.66	1757.62	1755.82
G 20.0	1712.12	1713.64	1715.22	1713.89	1716.32	1727.92	1716.32	1713.89	1715.22	1713.64	1712.12	1711.99	1709.96
G 25.0	1660.11	1665.82	1670.32	1666.84	1664.56	1667.52	1664.56	1666.84	1670.32	1665.82	1660.11	1658.60	1660.37
G 30.0	1591.46	1593.22	1594.09	1593.46	1600.55	1625.56	1600.55	1593.46	1594.09	1593.22	1591.46	1591.14	1589.98
G 35.0	1537.48	1539.59	1543.64	1540.61	1539.38	1543.77	1539.38	1540.61	1543.64	1539.59	1537.48	1537.79	1537.83
G 40.0	1457.67	1455.46	1455.83	1456.68	1466.24	1485.30	1466.24	1456.68	1455.83	1455.46	1457.67	1460.72	1458.57
G 45.0	1393.09	1394.13	1394.83	1394.23	1404.55	1439.89	1404.55	1394.23	1394.83	1394.13	1393.09	1393.03	1393.63
G 50.0	1332.02	1333.04	1333.78	1334.75	1338.12	1346.88	1338.12	1334.75	1333.78	1333.04	1332.02	1331.59	1332.92
G 55.0	1235.93	1230.33	1226.00	1228.52	1245.78	1275.73	1245.78	1228.52	1226.00	1230.33	1235.93	1236.28	1227.76
G 60.0	1146.17	1153.06	1149.94	1146.28	1158.41	1206.43	1158.41	1146.28	1149.94	1153.06	1146.17	1138.32	1148.85
G 65.0	1046.92	1047.16	1044.64	1045.77	1063.53	1097.26	1063.53	1045.77	1044.64	1047.16	1046.92	1046.45	1051.41
G 70.0	960.19	953.30	947.96	946.06	967.57	1012.98	967.57	946.06	947.96	953.30	960.19	962.65	952.63
G 75.0	834.33	842.43	844.44	837.27	853.17	923.42	853.17	837.27	844.44	842.43	834.33	832.18	833.39
G 80.0	665.93	657.61	647.41	649.04	679.59	735.45	679.59	649.04	647.41	657.61	665.93	665.58	658.42
G 85.0	455.61	460.57	464.48	460.50	484.37	572.79	484.37	460.50	464.48	460.57	455.61	455.97	464.29
G 90.0	325.84	329.08	330.35	323.63	322.51	331.39	322.51	323.63	330.35	329.08	325.84	325.17	325.33

Luminaire		Measurem.		Lamp	
Code	0324905 CU	Code	0324905 CU	Code	49885
Name	PLAFONET 6x20W CFL E26 cream U	Name	PLAFONET 6x20W CFL E26 cream U	Number	6
Line	- BOVER	Date	03-02-2012	Position	Universal

Efficiency	66.69%	Coordinate system	CG	Total Flux	7200.00 lm
Maximum value	185.83 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	

Luminance cd/m2 **Table 3/3**

	C 260.00	C 270.00	C 280.00	C 290.00	C 300.00	C 310.00	C 320.00	C 330.00	C 340.00	C 350.00
G 0.0	1887.63	1887.63	1887.63	1887.63	1887.63	1887.63	1887.63	1887.63	1887.63	1887.63
G 5.0	1842.58	1842.93	1842.58	1841.88	1841.52	1842.60	1843.84	1844.61	1845.37	1845.96
G 10.0	1803.24	1805.49	1803.24	1804.11	1806.32	1807.07	1810.88	1816.01	1809.27	1805.66
G 15.0	1755.37	1757.02	1755.37	1755.82	1757.62	1758.66	1762.12	1763.60	1756.45	1759.63
G 20.0	1708.61	1709.13	1708.61	1709.96	1711.99	1712.12	1713.64	1715.22	1713.89	1716.32
G 25.0	1661.04	1659.23	1661.04	1660.37	1658.60	1660.11	1665.82	1670.32	1666.84	1664.56
G 30.0	1589.89	1591.51	1589.89	1589.98	1591.14	1591.46	1593.22	1594.09	1593.46	1600.55
G 35.0	1536.90	1535.88	1536.90	1537.83	1537.79	1537.48	1539.59	1543.64	1540.61	1539.38
G 40.0	1454.43	1450.82	1454.43	1458.57	1460.72	1457.67	1455.46	1455.83	1456.68	1466.24
G 45.0	1393.25	1391.64	1393.25	1393.63	1393.03	1393.09	1394.13	1394.83	1394.23	1404.55
G 50.0	1332.49	1329.34	1332.49	1332.92	1331.59	1332.02	1333.04	1333.78	1334.75	1338.12
G 55.0	1224.04	1229.61	1224.04	1227.76	1236.28	1235.93	1230.33	1226.00	1228.52	1245.78
G 60.0	1153.55	1143.47	1153.55	1148.85	1138.32	1146.17	1153.06	1149.94	1146.28	1158.41
G 65.0	1051.88	1044.69	1051.88	1051.41	1046.45	1046.92	1047.16	1044.64	1045.77	1063.53
G 70.0	948.58	956.99	948.58	952.63	962.65	960.19	953.30	947.96	946.06	967.57
G 75.0	833.53	831.39	833.53	833.39	832.18	834.33	842.43	844.44	837.27	853.17
G 80.0	656.91	664.22	656.91	658.42	665.58	665.93	657.61	647.41	649.04	679.59
G 85.0	474.68	484.01	474.68	464.29	455.97	455.61	460.57	464.48	460.50	484.37
G 90.0	325.83	326.55	325.83	325.33	325.17	325.84	329.08	330.35	323.63	322.51